
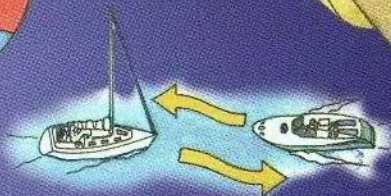
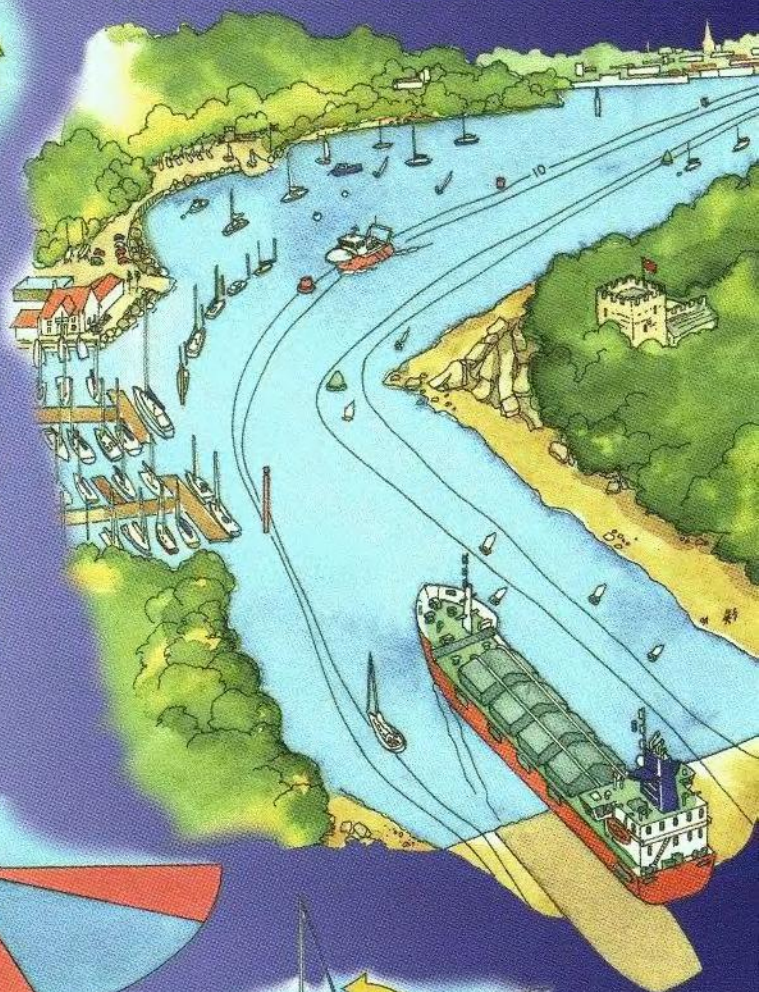
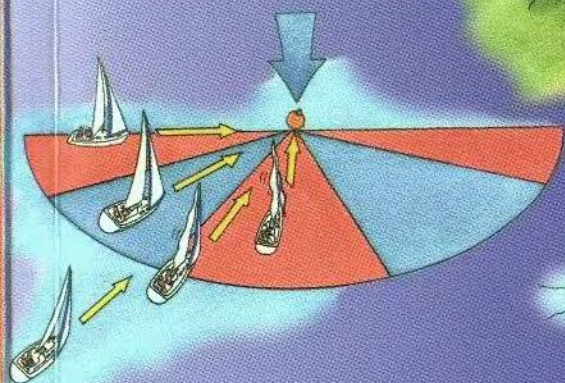


day skipper

PRACTICAL COURSE NOTES

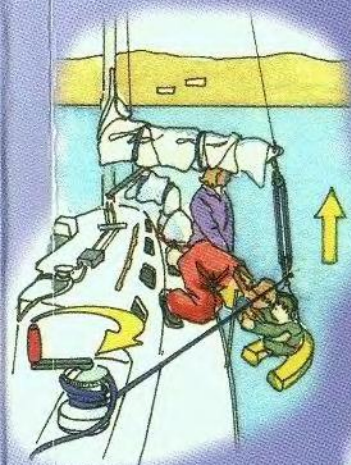

Navigation, safety
and seamanship

TRAINING COURSES

140,000 people improve their skills every year

- Inland Waters
- VHF Short Range Certificate
- Basic Sea Survival

Competent Crew

RYA Day Skipper, RYA/MCA Coastal Skipper

RYA/MCA Yachtmaster Offshore

RYA/MCA Yachtmaster Ocean

*navigation and seamanship,
theory and practical*

- Windsurfing
beginners to wave sailing
- First Aid
- Race Management
- Powerboat and Personal Watercraft
- Radar
- Diesel Engine Maintenance
- RYA National Sailing Scheme



RYA

more boating knowledge from
www.rya.org.uk

For a training brochure, advice or details of personal membership
call the RYA on 0845 345 0400 or email info@rya.org.uk

day skipper



practical course notes

Written by: Andy Thompson

Penny Haire

Simon Jinks

Illustrations by: Sarah Selman

Typeset: Creativebyte

Printed in China through World Print Ltd.



www.rya.org.uk

Royal Yachting Association

RYA House, Ensign Way, Hamble, Southampton SO31 4YA

Tel: 0845 345 0400 Fax: 0845 345 0329

email: training@rya.org.uk website: www.rya.org.uk

British Cataloguing in Publication Data

A Catalogue record of this book is available from the British Library.

ISBN: 1906104138

All rights reserved. No part of this publication may be transmitted, stored in a retrieval system, or transmitted, in any form or by any means, electronic, mechanical, photocopying, recording or otherwise, without the prior permission of the publisher.

© Royal Yachting Association 2005

CONTENTS

Introduction	3	Dropping the headsail	45
Preparation for sea	4	Reefing the mainsail	46
Engine checks	6	Mooring under sail	48
Managing the sail plan	8	mooring buoys	48
Safety briefing	10	close reach - strategy	50
Handling under power	12	wind and stream	52
the basics	12	Man Overboard	54
going astern	14	getting the MOB on board	55
effects of wind and stream	15	Sending a distress message	56
judging speed and drift	17	Flares	57
tight turning	18	Abandoning to the liferaft	58
coming alongside	19	Helicopter rescue	59
Berthing	21	Securing a tow	60
assessing the situation	21	Running aground	61
basic approaches	22	Planning a short passage	62
berthing in stream	23	how far	62
Leaving a berth	26	constraints	62
Anchoring	29	estimated time of departure	64
scope and swinging room	29	pilotage	65
Stern and bow-to mooring	32	navigation	67
IRPCS	34	running the passage	68
first principles	34	Fog	69
will we collide	35	Weather	70
vessels in sight of one another	36	Beaufort force	70
narrow channels	38	northern hemisphere	71
hierarchy	40	southern hemisphere	71
sound signals	41	shipping forecast areas	72
Points of sail and sail trim	42	terms used in forecasts	73
Headsail changes	44	planning the day	74




More than 11,000 people, throughout the world, successfully complete a RYA Day Skipper course every year.

The courses are run by over 320 RYA Training Centres around the UK and overseas. Using a RYA recognised centre will ensure that you are taught to the RYA's high standards, and your course will be safe, informative and enjoyable.

Day Skipper Practical Course Notes has been compiled to complement the Day Skipper Practical course and draws on the cumulative experience of hundreds of experienced sailing instructors. The techniques shown or described are tried and tested and are suitable for most types of cruising yacht.

I hope that you enjoy the book and find it useful. Good sailing!

Simon Jinks
RYA Chief Cruising Instructor

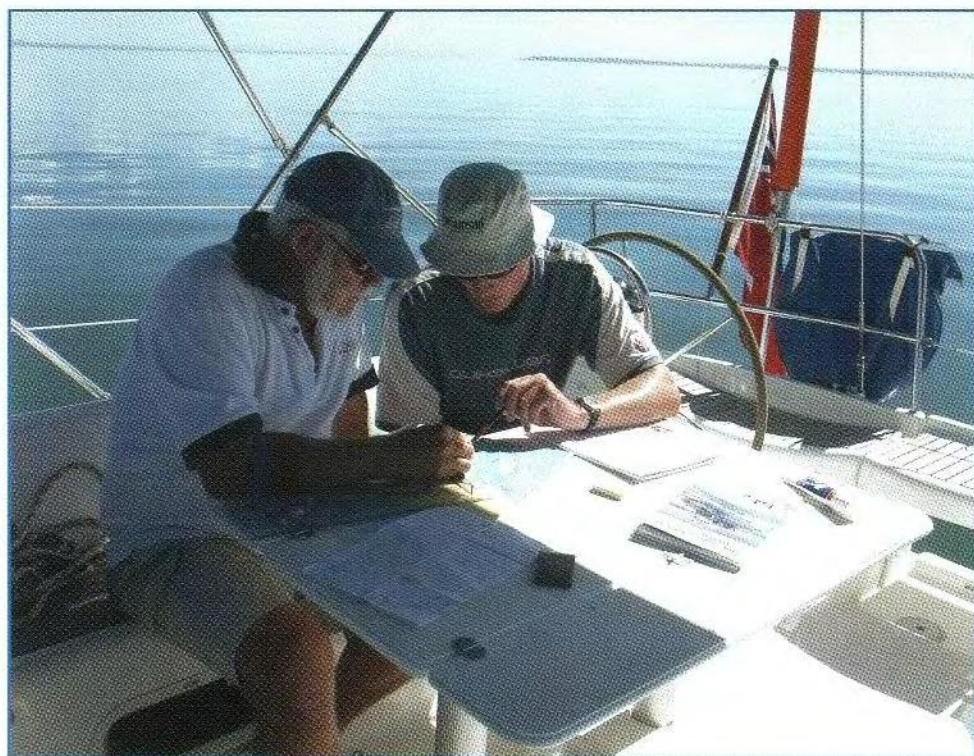

PREPARATION FOR SEA

Prepare the yacht for sea before leaving harbour. Brief the crew about the passage and consider the crew strengths.

Crew

Give a safety brief.

Brief the crew about the passage.

Check if any crew have a medical condition you should be aware of.

Check lifejackets and harnesses are adjusted correctly.


Advise sea sick prone crew to take medication.



Weather

Obtain the latest weather forecast.

Check the local conditions.

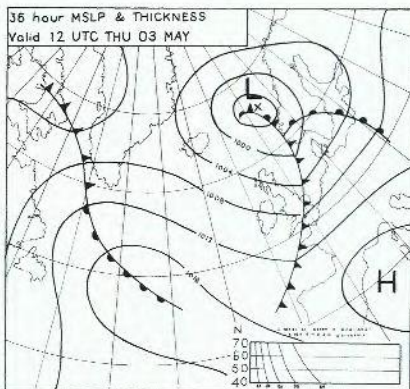

Victualling

Ensure there is enough food and drink.


Prepare meals for a passage in advance.

Stow snacks in readily accessible areas.

Navigation

Prepare a passage and pilotage plan.


Check charts are up to date and give adequate coverage.

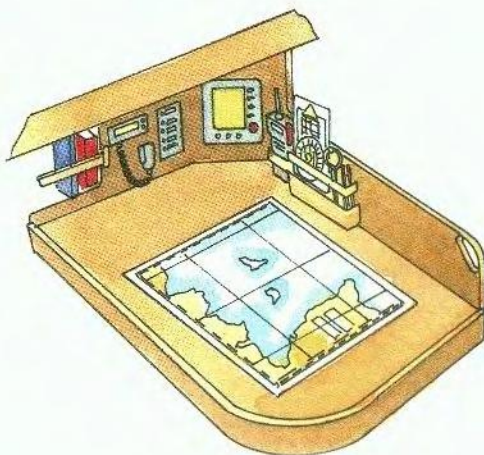

Fuel

- Check there is sufficient fuel.

PREPARATION FOR SEA


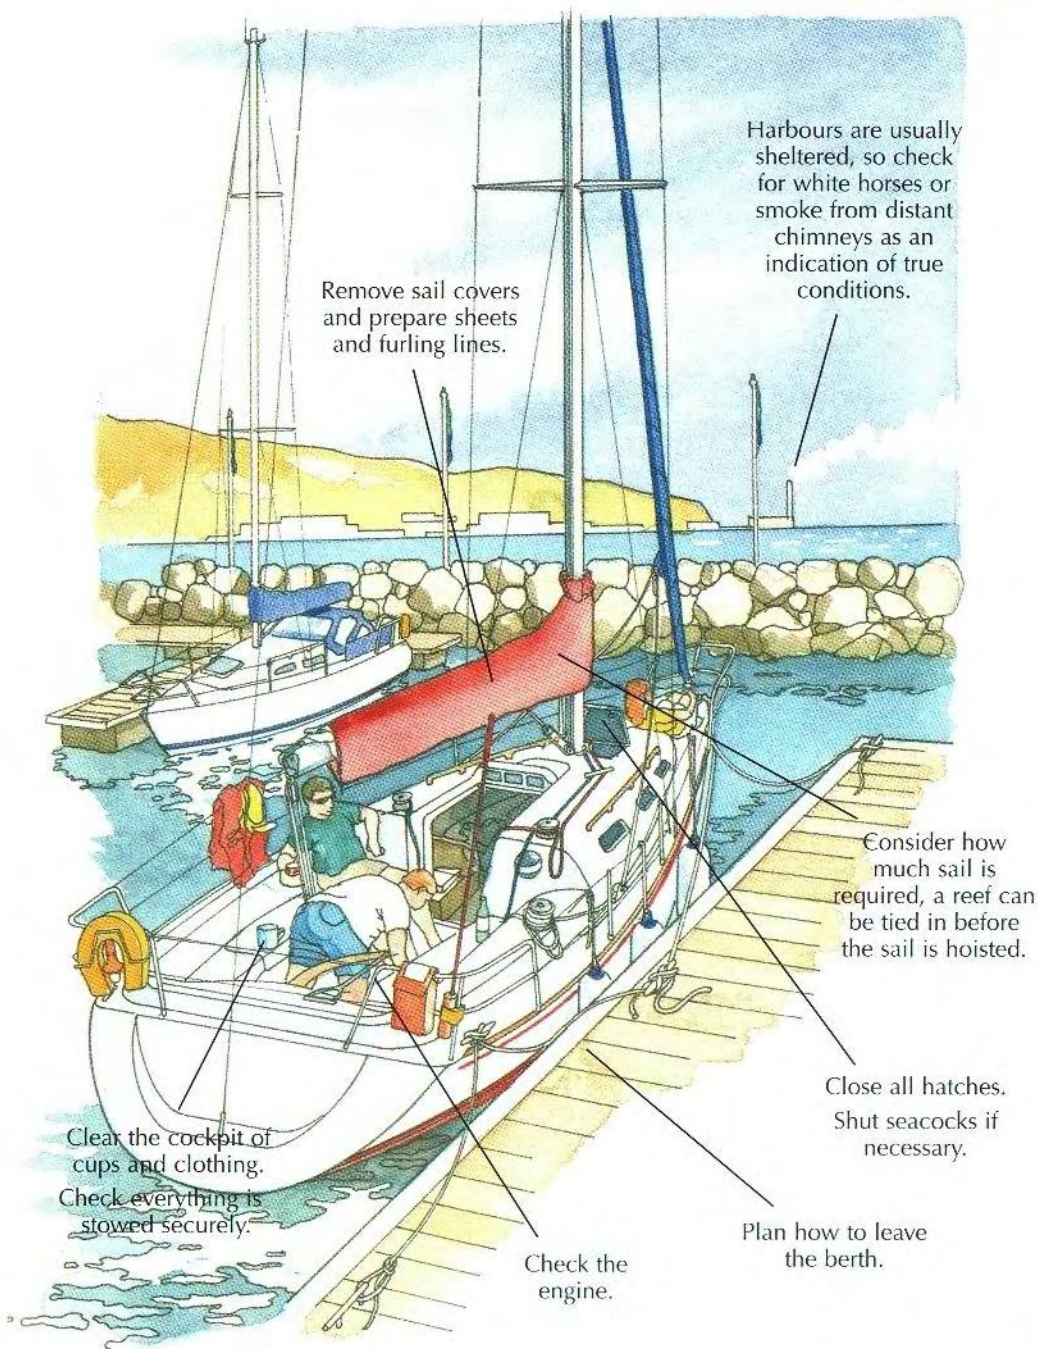


A daily engine check is the best way to spot potential problems. Engine problems are the most common cause for lifeboat callouts, most are preventable by regular checks.

Use a daily check to look for: oil, fuel or water leaks; loose belts; signs of wear; lube oil levels.

Keep the fuel tank full to avoid condensation and water in the fuel. A low level disturbs sediment in the tank which could block fuel filters.

Top-up levels if required.



Engine starting procedure

Check no lines are in the water.

Start the engine.

Check for cooling water from the exhaust, recheck after 30 seconds.

Check fuel gauge and other instruments are registering.


Check volt meter to ensure the battery is charging.

Check fresh water level of expansion tank or heat exchanger.

Ensure the seawater intake strainer is cleaned weekly and that the engine seacock is open.

Check the alternator and other drive belts. Refer to handbook for correct tension.

Carry a toolkit plus spare fuel filters, impellor and belts.

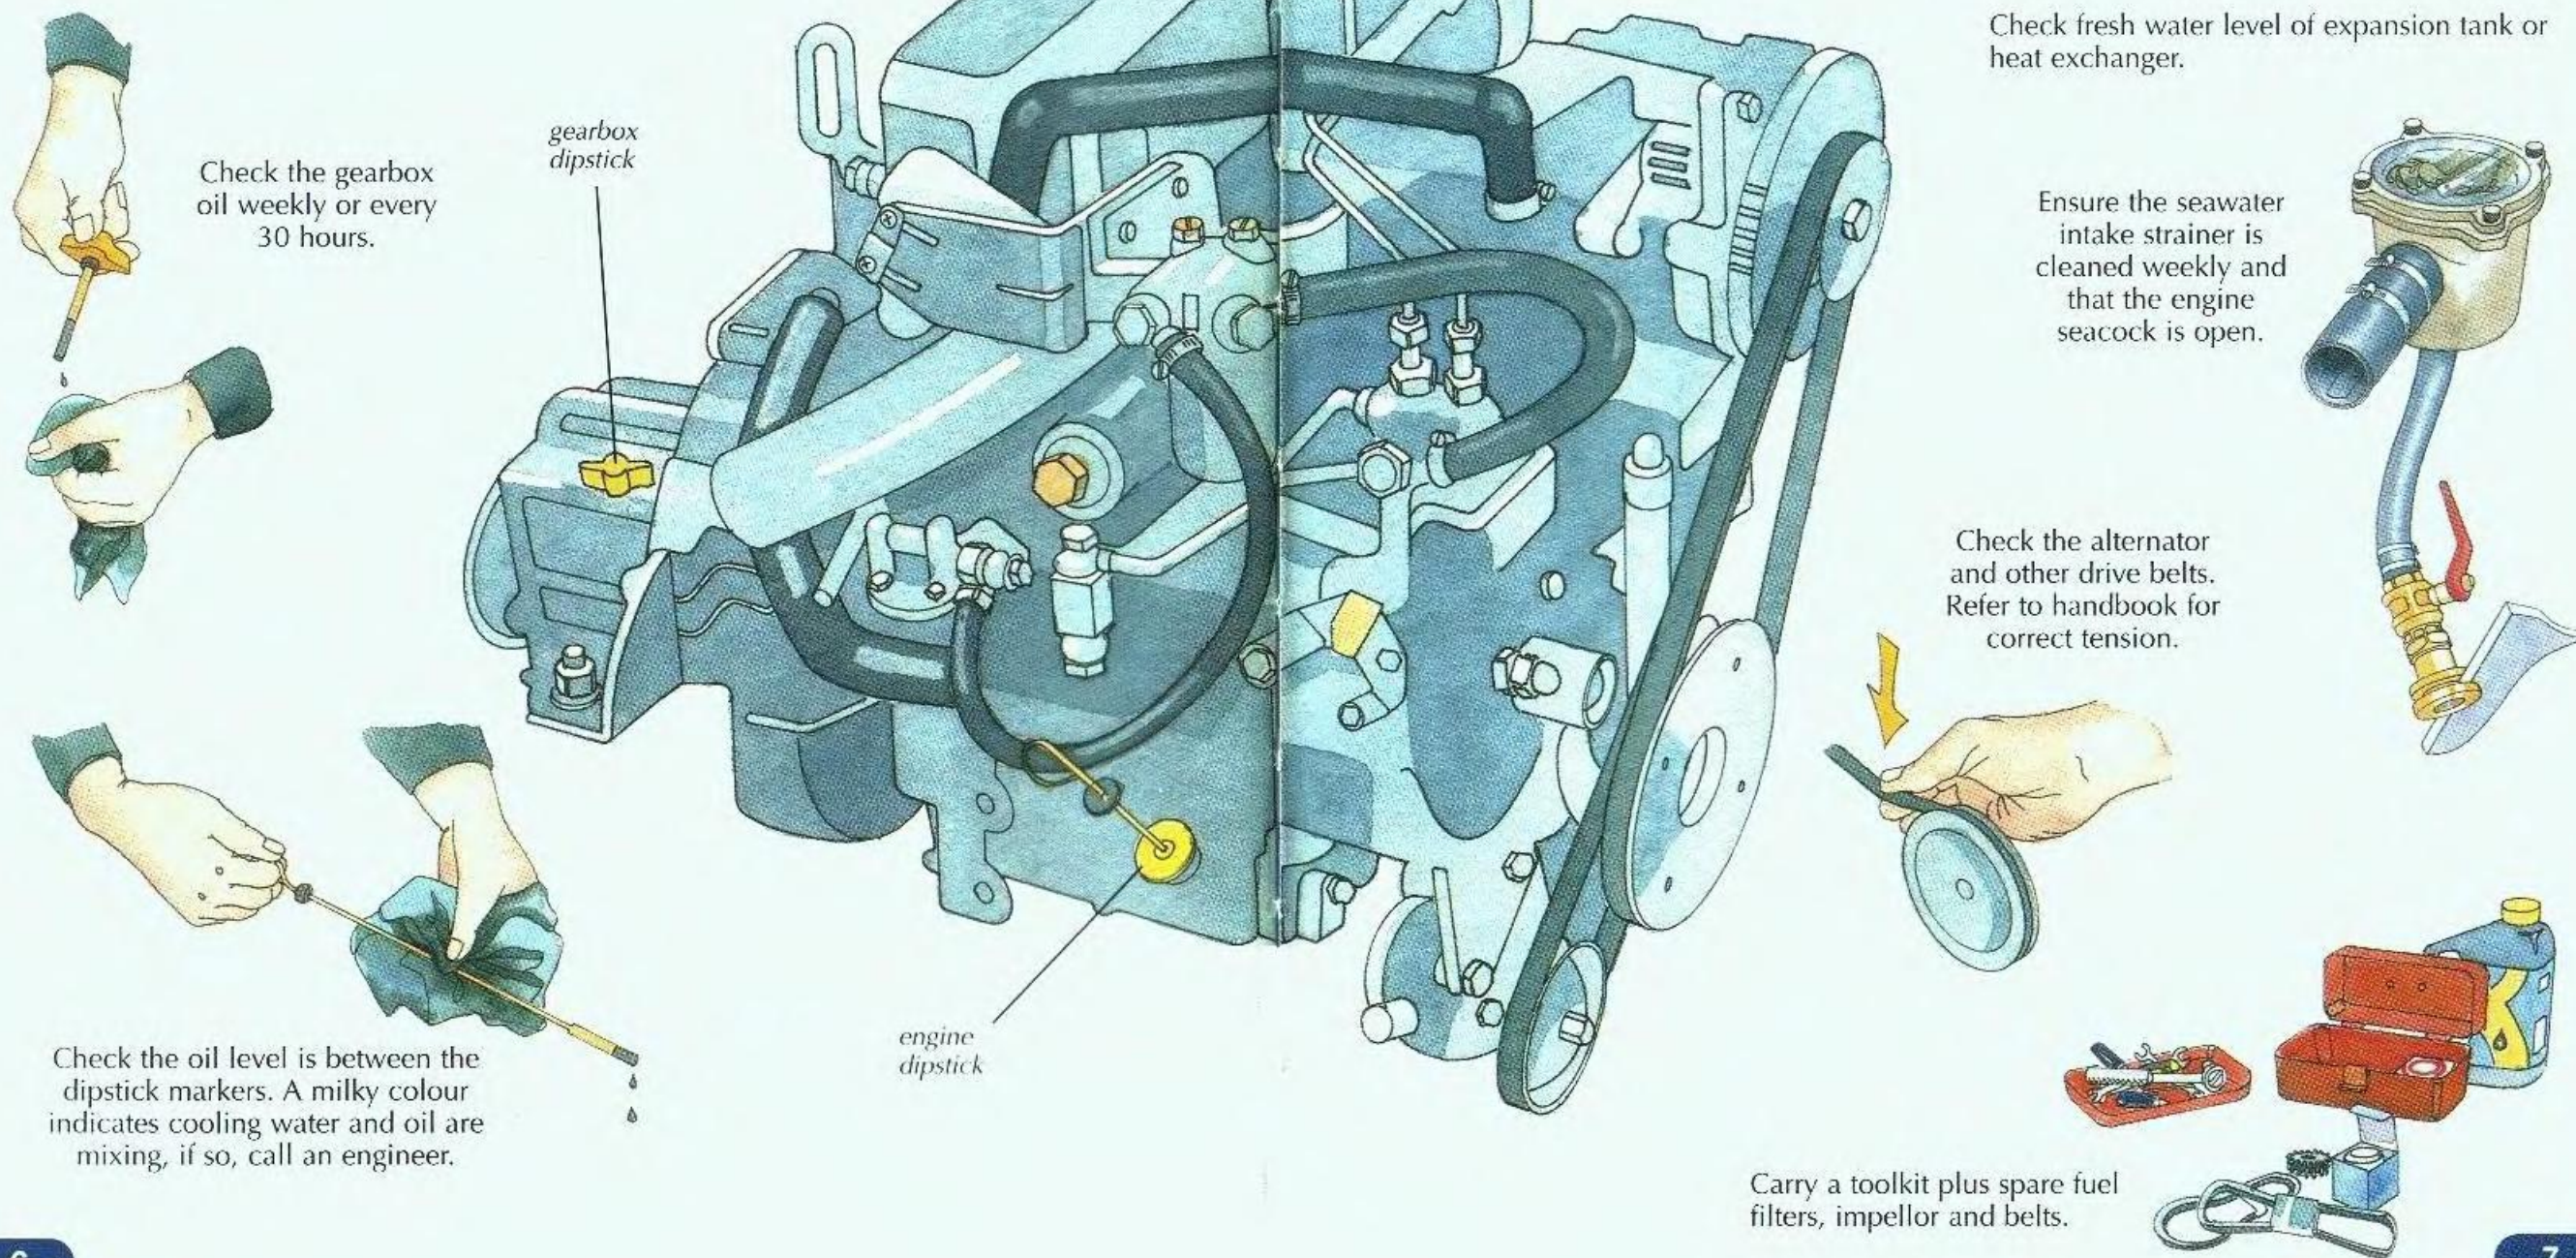


Check the oil level is between the dipstick markers. A milky colour indicates cooling water and oil are mixing, if so, call an engineer.

MANAGING THE SAILPLAN

Boats are designed to sail upright or heeled up to 20 degrees, this is when they are most comfortable to sail.



If the boat feels uncomfortable, reduce the sail area.

Results of excessive heeling are;

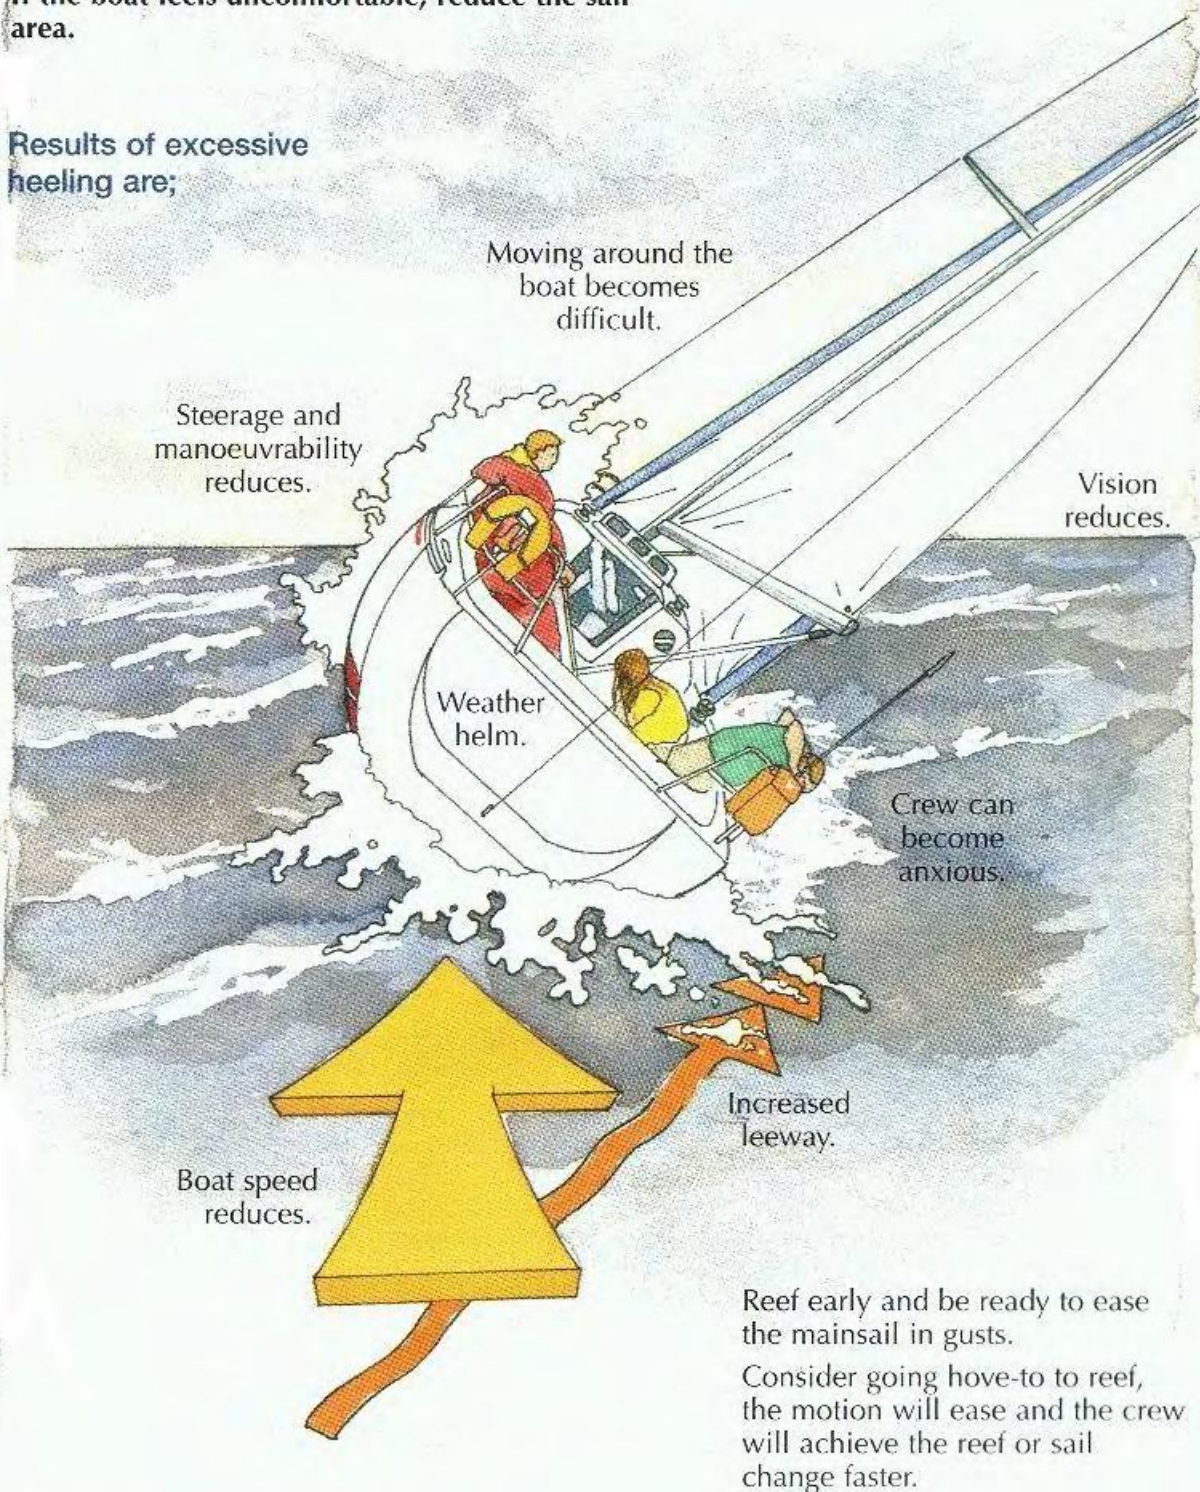

MANAGING THE SAILPLAN


Sail selection is a key part of preparing to go to sea. If in doubt, put in a reef and prepare a smaller headsail before you depart. It is always easier to put more sail up than to take it down.

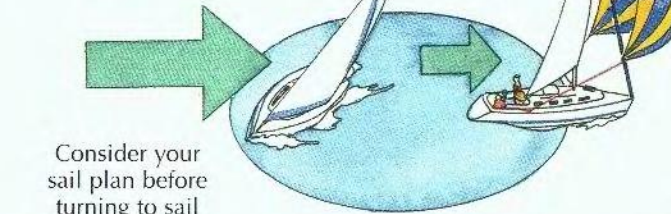


Consider your sail plan before turning to sail close-hauled.

A boat can carry more sail downwind than upwind.

A light modern boat, may be more sensitive on the helm, than an older heavier boat.

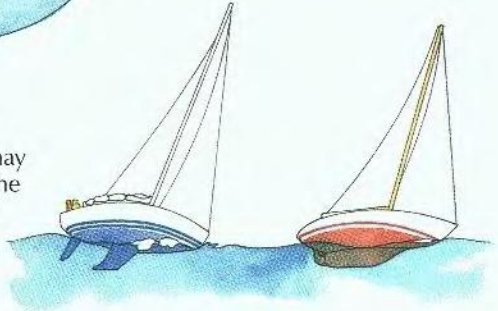

For a typical modern boat, these guidelines may help prepare the right amount of sail. Reduce headsail, then mainsail to keep the sail plan balanced.

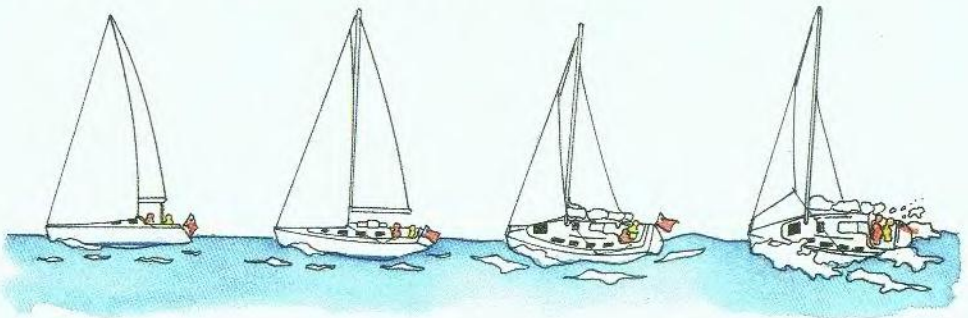


Wind speed in knots	0-12	13-15	16-20	21-25	26-30	31-35
Main	Full	Full	1 reef	2 reefs	3 reefs	3 reefs
Jib (Headsail)	Full	Full	3/4	1/2	1/3	Storm jib

Give a safety brief covering where the safety equipment is kept, how it works and when to use it.

Flares

Location.
Types of flares.
How and when to use.
To take a bearing, if a flare is seen.

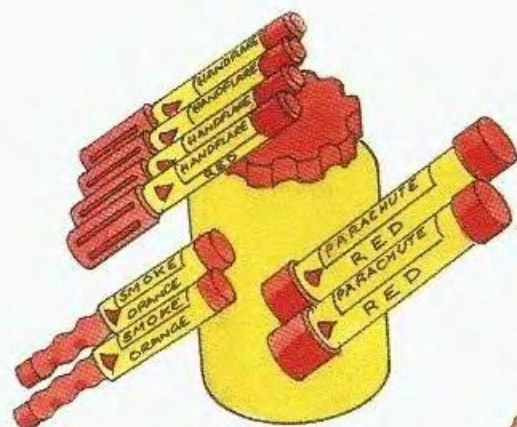

Fire extinguishers

Location of extinguishers and fire blanket.
How to use them.



Man overboard recovery

What to do in the event of a MOB.
Use of lifebuoys, danbuoys and lights.
Check MOB equipment works and releases quickly.
Procedure for recovery from water.

Gas

How to use the cooker.
Location of bottle and shut off.
What to do in the event of a leak (ventilate) – no naked flames.

Deck equipment

How deck equipment works; anchor, clutches, winches.
How to start and stop the engine.

Radio

VHF DSC Operation.
How to send a Mayday.

Personal safety equipment

Use, operation and location of lifejackets and harnesses.
Jackstays and other clip on points.
Liferaft; how and when to launch and location of the grab bag.



Accident and injury

Identify danger areas; boom, winches, clutches, open hatches.
Work on the windward deck, when the boat is heeled.
Location of first aid kit.

Spares

Where to find extra fuel, spares and toolkits.


HANDLING UNDER POWER

THE BASICS

Throttle and gear control

One lever controls both gear and throttle. Pushing the lever forward or backwards by one click engages gear with engine idling, further movement increases power.

When changing between gears rest the lever in neutral momentarily to reduce the chance of gear crashing.

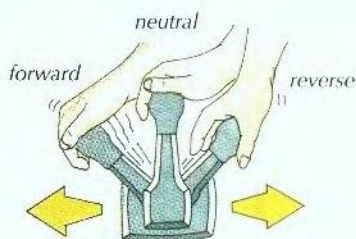


Rudders

A boat will only react to steering when there is water flowing over the rudder. Flow over the rudder is gained from: the propeller (propwash); the boat moving through the water; or when a stream of water is running over the rudder.

Yacht rudders have a large surface area and are able to steer at very slow speeds.



Turning the rudder and engaging gear throws propwash over one side of the rudder, increasing the rudders effectiveness and turning the boat in a smaller circle.

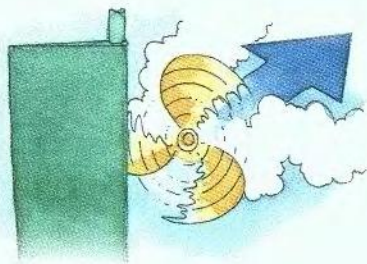


When going astern, propwash does not flow across the rudder. Steering relies on water flow gained by movement astern.

When manoeuvring in tight spaces, turn the rudder first and then apply power. The propwash from the propeller deflects off the angled rudder and turns the boat in a smaller space.



Pivot points

When a boat turns the bow goes one way and the stern the other. Because of the position of the rudder it is actually the stern of the boat being steered even though the bow is turning. When motoring ahead a yacht pivots around a point approximately a third from the bow, roughly at the mast.



In ahead; beware of colliding with obstructions with your stern.

In astern, the pivot point moves to a point approximately a third from the stern. Monitor the bow, because this is when it will swing the most.




right hand propeller

Propellers

Propellers are designed to push the boat forward through the water. Props are handed, either left or right hand, referring to their rotation in forward gear.

Propwalk

The propeller rotation can also make the stern walk to one side. This action is called propwalk and is more prominent when going astern. Propwalk can be used to advantage during tight turns and its effect is taken into account during reversing and all manoeuvres.

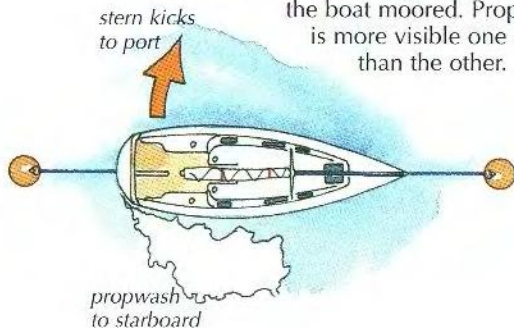


To find propwalk direction, run the engine astern with the boat moored. Prop wash is more visible one side than the other.


GOING ASTERN

When going astern the yacht is affected in three ways.

1 The pivot point moves aft to a point a third from the stern. This makes the stern initially seek the wind as bow windage increases.

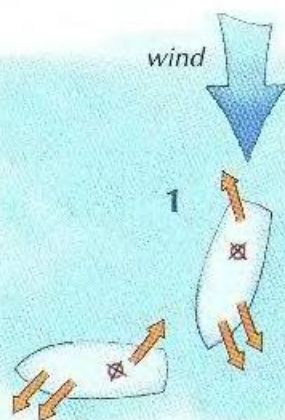

2 Propwalk may initially kick the stern one way.

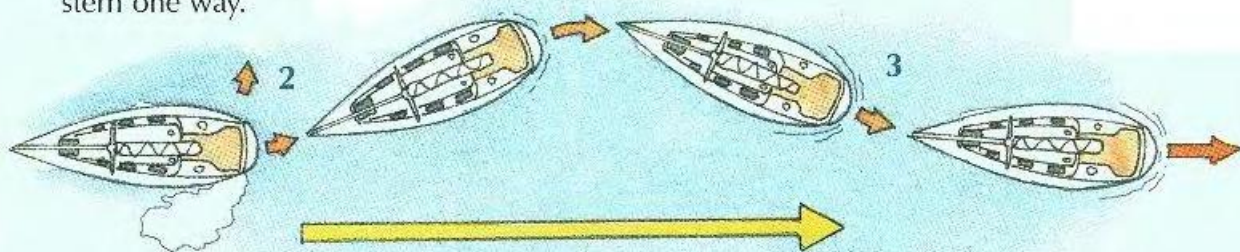

3 Steerageway is only gained once the boat is moving astern.

Start from stopped or slow in the water.

If your boat does not like going astern, start off stern to wind to get it reversing easily.

Use positive power to start with, and then ease off.

Use minimal rudder.


If the yacht sheers excessively, go ahead to stop the boat and start again.

Most modern yachts handle well astern, but some older boats can be difficult.

Use both hands on the wheel or tiller as the steering will be heavy.

Because the bow will travel twice as much as the stern, look forward and backwards to monitor the boat.

Go too fast, or use too much rudder and the tiller or wheel will react violently. This could break the steering mechanism.

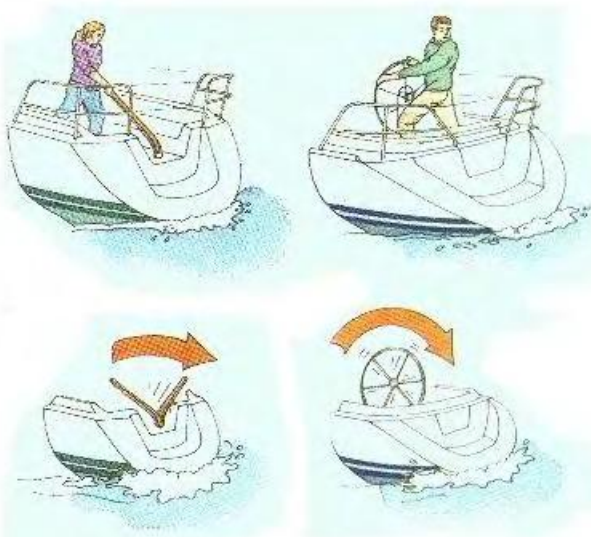


EFFECT OF WIND AND STREAM



Wind and stream have an effect on how the boat reacts when manoeuvring.

A boat that has stopped or is slow moving will drift downwind. Good wind awareness is essential to avoid drifting onto obstructions.

Be aware of wind direction. Flags, wind indicators on the mast and wind ruffling the surface of the water are all useful telltales.

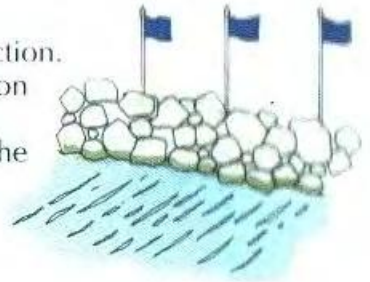

The bow will always drift downwind first as the bow has less grip in the water and more windage than the stern.

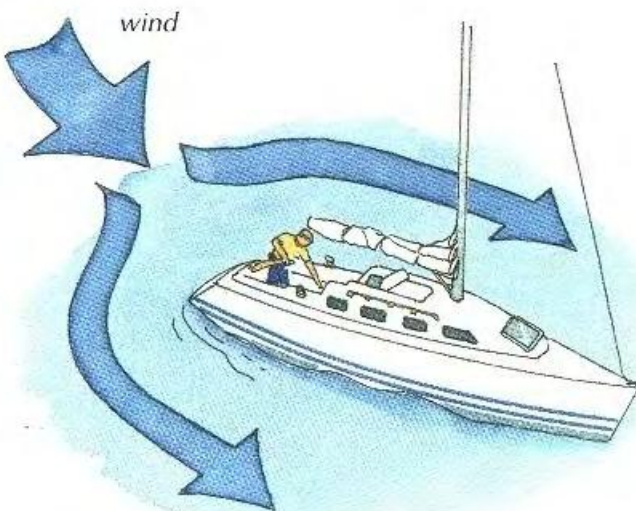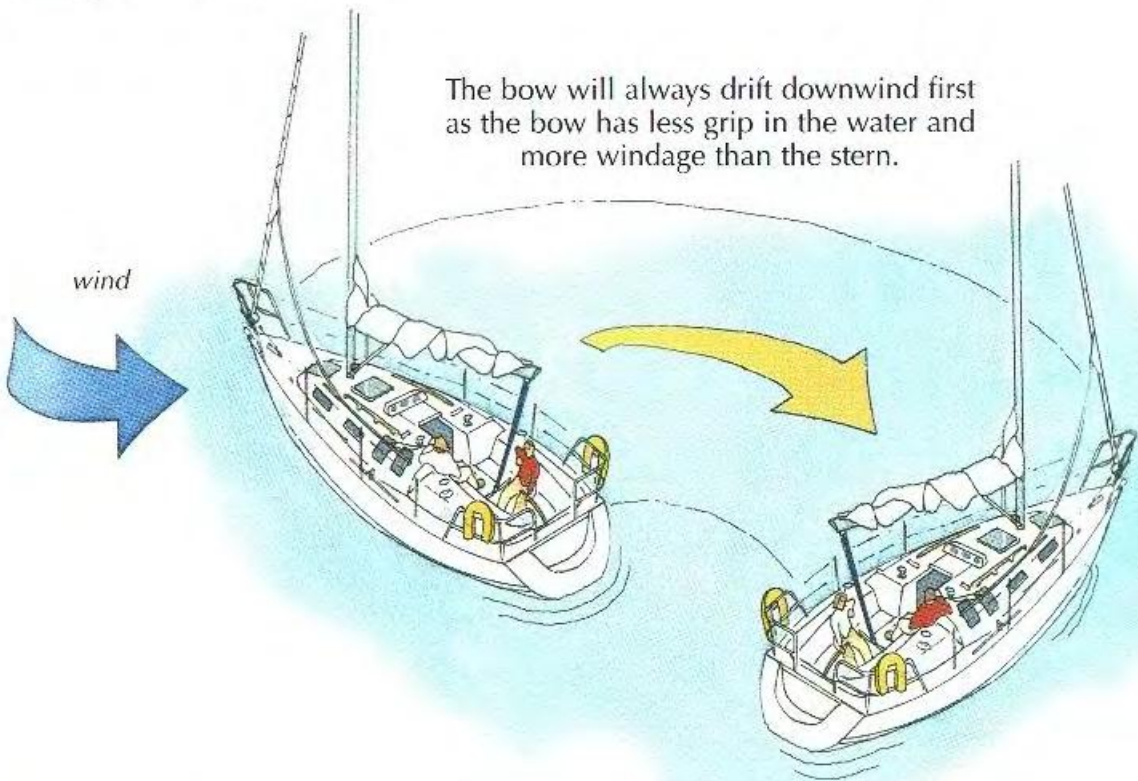

The easiest way to hold position in wind is to reverse gently and sit stern to wind. Reversing moves the pivot point aft enabling the bow to easily blow downwind.

HANDLING UNDER POWER

Streams


A stream is caused by tide, natural river flow or local movement of water, as around locks. Streams are similar to a conveyor belt, they move you in one direction.

Travel with the stream and travel will be faster past the shore.


Travel against the stream and travel will be slower past the shore.

Travel across the stream and you will be pushed sideways.

When coming alongside, berth into the stream. The boat will be slower over ground with increased water-flow over the rudder.

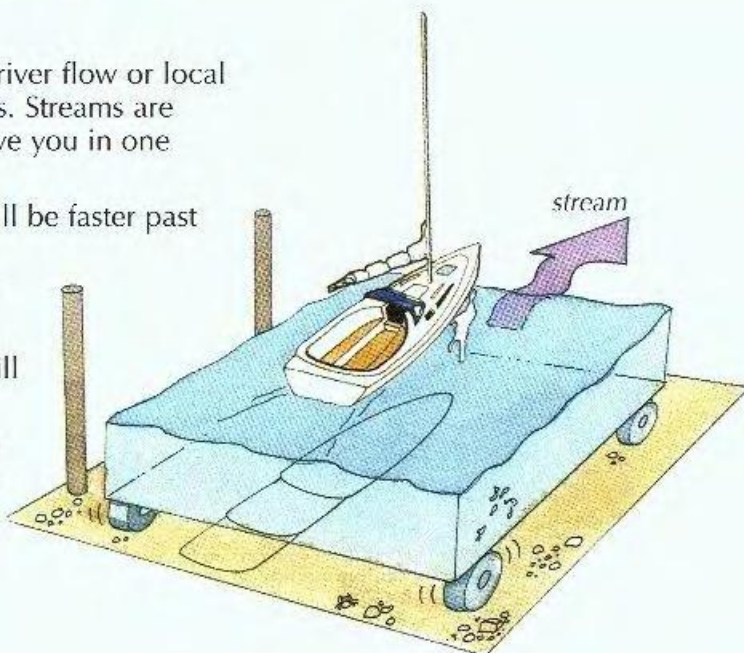

To assess the stream's direction, look for these signs.

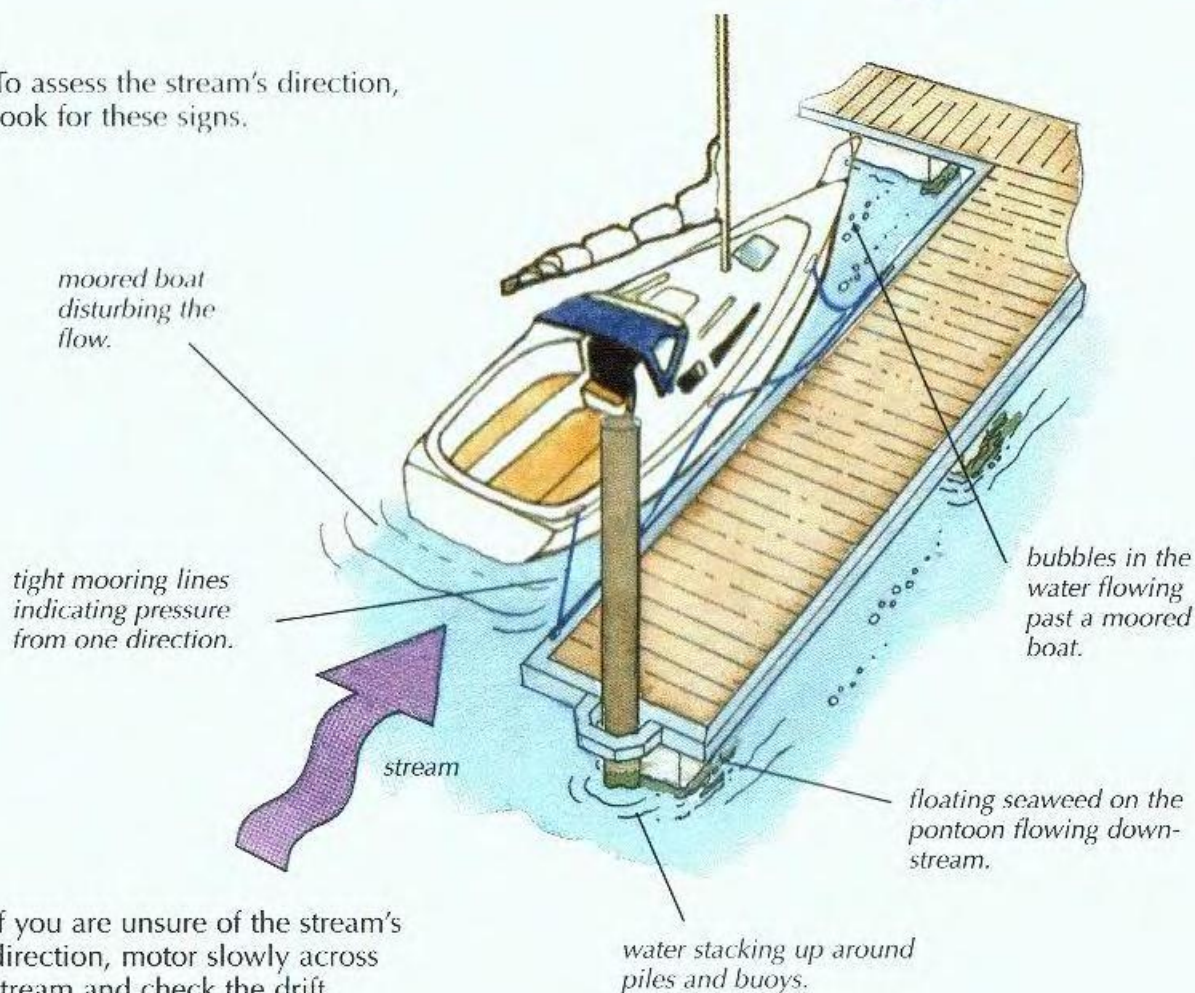

If you are unsure of the stream's direction, motor slowly across stream and check the drift.

JUDGING DRIFT AND SPEED

As a boat slows, drift from a cross stream or crosswind will increase. Use transits to judge this during boat handling.

Drift



When approaching a buoy or a pontoon in a crosswind, select an object beyond it to help judge the drift on the approach.

Steer towards the first point of reference to regain the transit.

too far to the left.

spot on.

too far to the right.

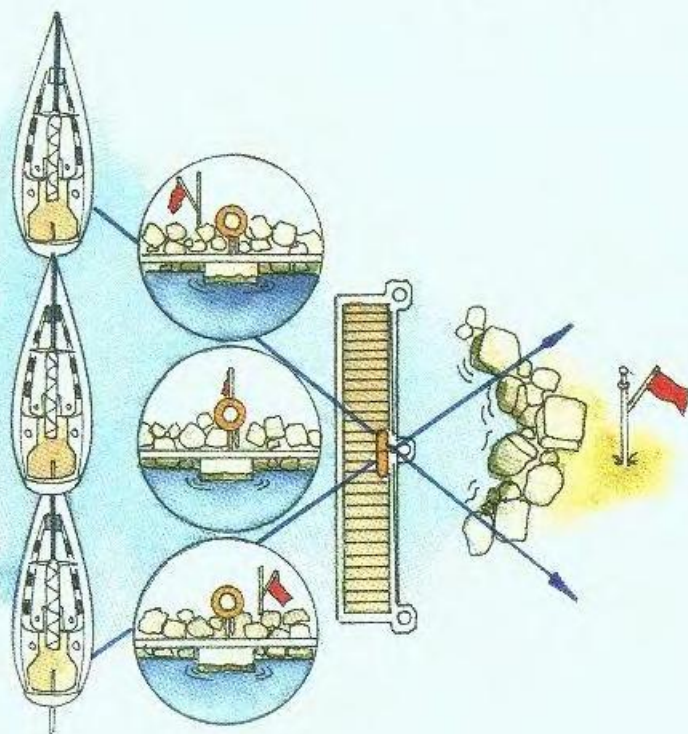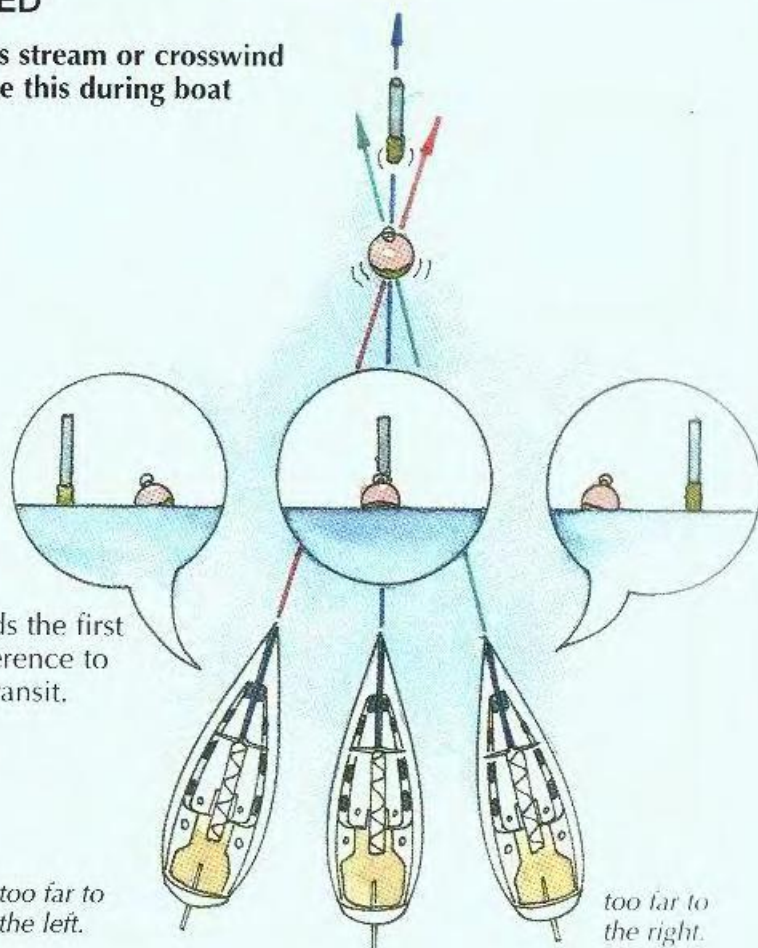

Speed


Find two objects abeam to check your speed over ground.

If there is a lot of stream running an electronic log can register 2-3 knots even when the boat is stationary, only a transit will confirm this.

HANDLING UNDER POWER


TIGHT TURNING

For a tight turn; start from stopped in the water, or from very slow speed. Speed carried into a turn increases the turning circle and makes the yacht slide sideways, increasing the radius.




Turning in wind

Turn the bow through the wind. Once the bow is through the wind it helps turn the yacht. This keeps the yacht away from downwind dangers. Try to keep the bow turning throughout the turn.

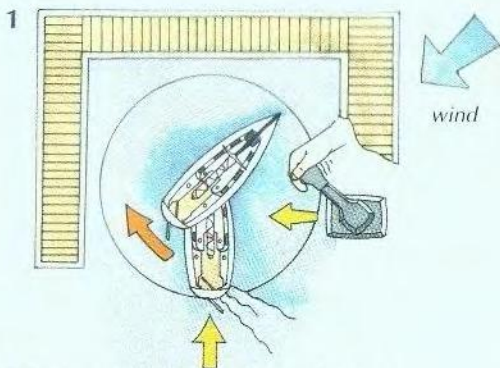


- 1 Position the boat central to the gap. Put the rudder hard over and give a short burst of power. Engage neutral.

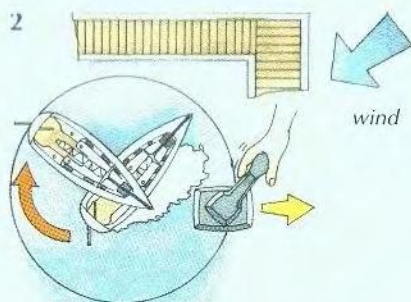

- 2 Go astern to stop the yacht moving forwards.

Engage neutral.

The rudder can *usually* be left in the same position as steerageway astern is not gained.

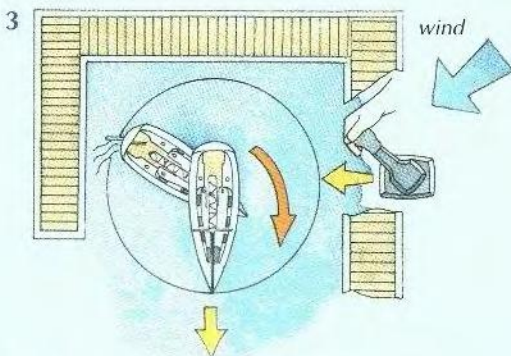

- 3 A final burst ahead keeps the boat turning. When pointing in the right direction, straighten the helm.

Use of propwalk

The effect of propwalk will either help or hinder a turn in wind. If there is no wind or tide, turn using propwalk to your advantage.


Turning in stream

When turning with a stream running through in a marina aisle turn the bow through the stream.

COMING ALONGSIDE

Good communication between skipper and crew is essential. Make a plan, advise your crew of it and what they will be required to do.

If the manoeuvre seems complicated, draw it out on paper to ensure everyone knows their job.

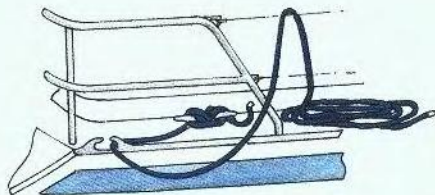


Lead warps from the cleat, under the guardrail and back over the guardrail.

One person with a roving fender is useful.

Fender the beam and the extremities of bow and stern as these may touch first.


On the approach, ask the crew to sit down and not obstruct your vision.

Ask the crew member at the bow, to call the distance.

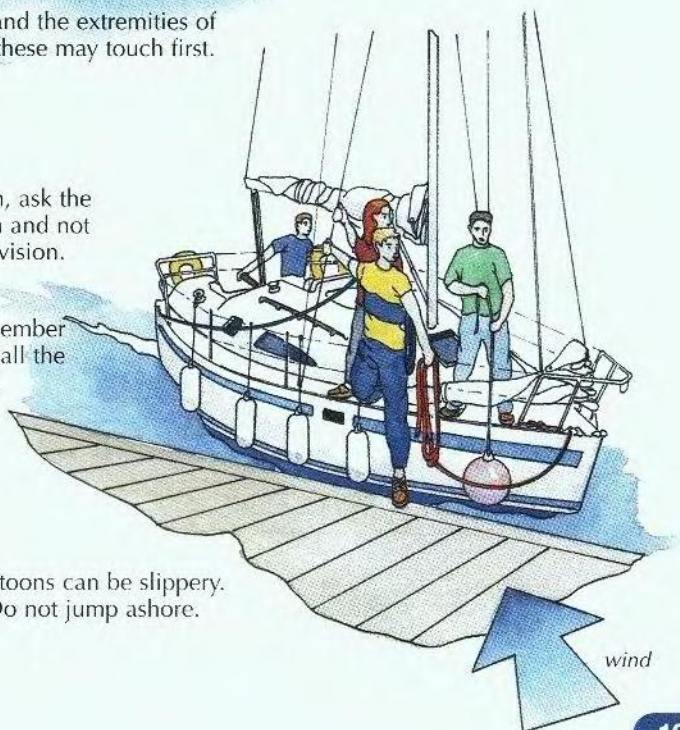

Pontoons can be slippery.
Do not jump ashore.

HANDLING UNDER POWER



Take a turn around the cleat and surge lines.

The bow line is taken forward.

Once alongside, stop the boat by using the engine astern.



The stern line is led aft to help slow the boat.

Caution; if the bow line is used to stop the boat, the stern will pivot away from the pontoon.

Bow and stern springs prevent fore and aft movement.



stern spring

bow spring


Secure to the cleat with a bowline, round turn and two half hitches or cleat off.

Take the slack on board so that stray rope is not left on the pontoon.

ASSESSING THE SITUATION

The direction and strength of wind and stream will change in different areas of a harbour or marina. Assess the conditions in the marina berth before committing to an approach. Carry out a trial run and have an escape route just in case. Brief the crew and have fenders and warps in place before starting an approach.

Look for signs of wind and stream before entry.

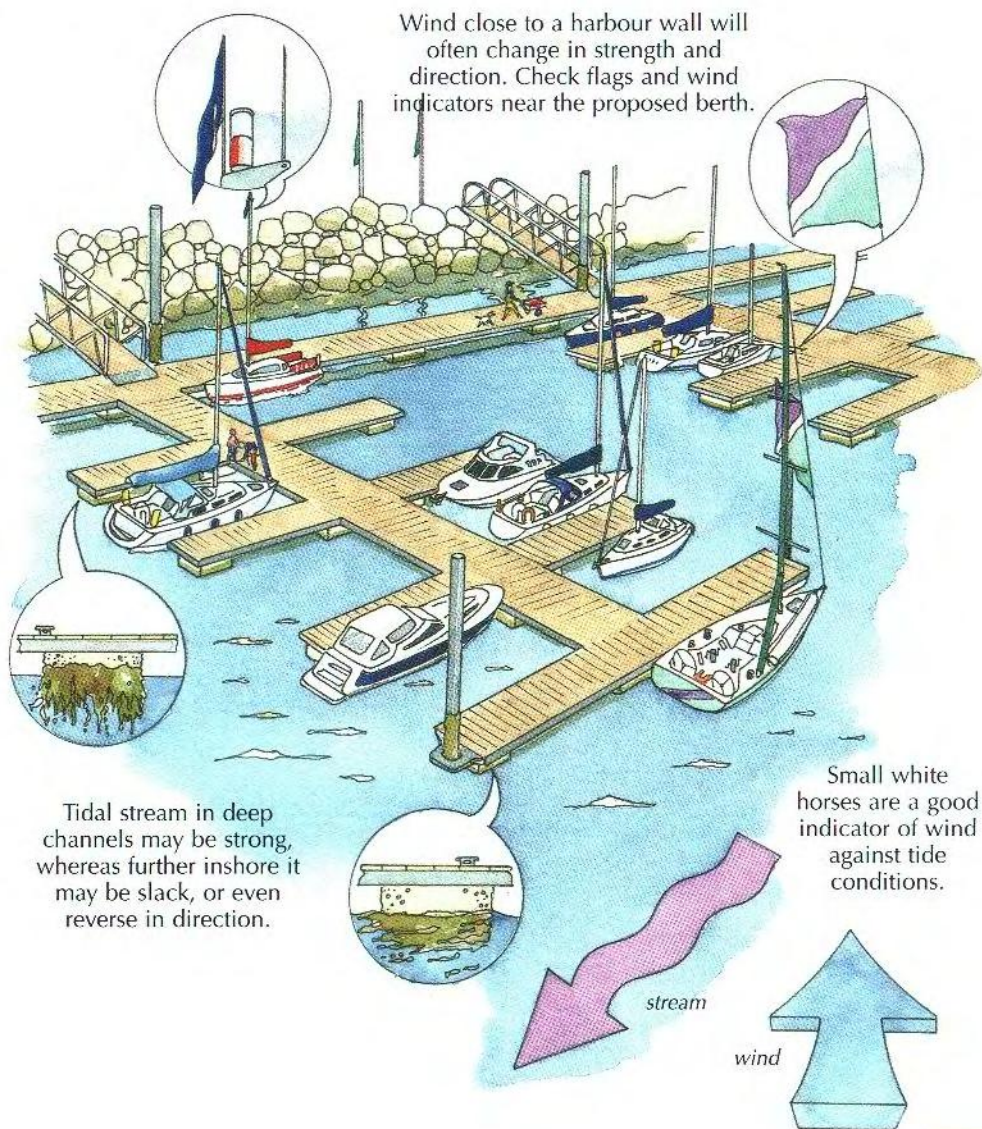

BASIC APPROACHES

Approach at the slowest speed that will allow steerageway and control. Usually only the boat's momentum and idle ahead is required.

No wind or tide


Aim for a point at the front of the berth.

Approach at a shallow angle.

Use idle ahead or neutral.

When close to the pontoon, steer the stern in parallel.

Go astern to stop.

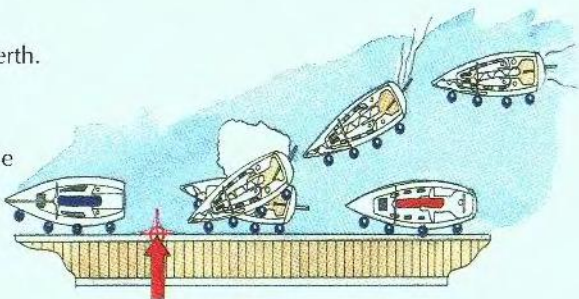


Onshore wind

Aim forward of the berth to prevent being blown downwind too early.

To counteract the bow blowing downwind, steer away from the pontoon and go ahead to keep the boat parallel.

Let the wind blow the boat alongside.

Go astern to stop once the fenders touch.

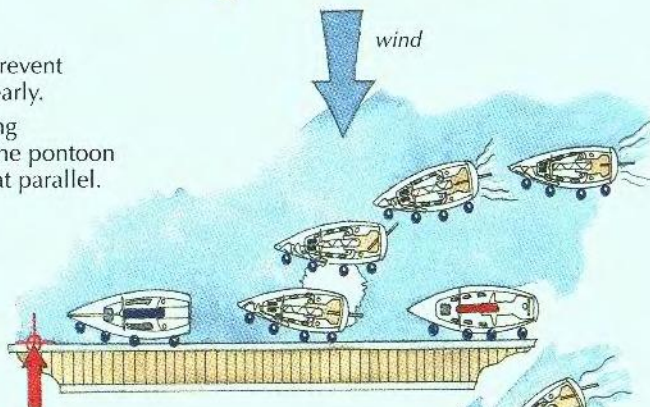

Offshore wind


An offshore wind requires a positive approach so fender the bow.

Aim at the centre or first third of the berth.

When about one metre away, steer parallel to the berth.


The boat should slide alongside.

Get warps ashore promptly and go astern to stop.

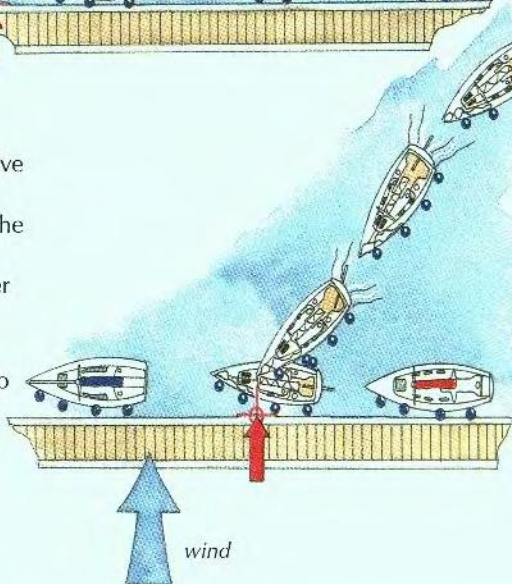


BERTHING IN A STREAM

The presence of stream will be the key factor in planning an approach.

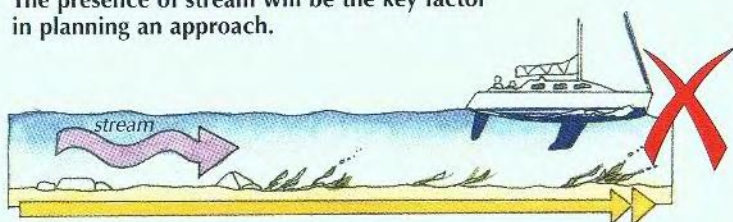


Approach with the stream and the speed towards a pontoon increases.

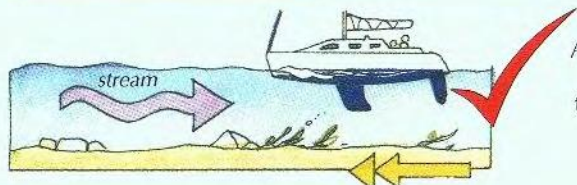


Approach into stream and the speed towards the pontoon decreases.

An approach into stream allows the slowest approach and greatest control due to increasing water flow over the rudder without increasing speed. Judge speed by looking at points abeam.

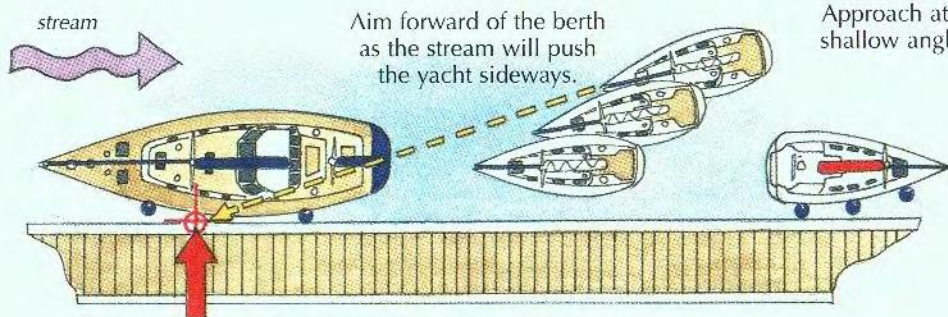

Approach at a shallow angle.

When in position, angle the yacht so that the stream moves her sideways.

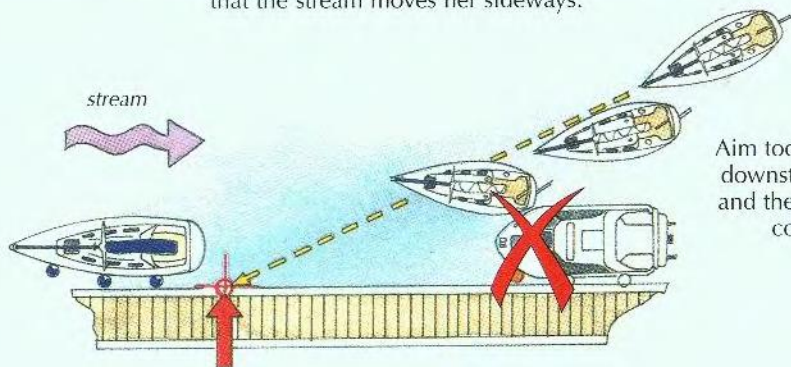


Aim too close to a downstream boat and the stern may collide.

BERTHING

Ferry gliding

Ferry gliding is a useful way to get into a tight berth when stream is present. The term describes stemming the stream and making the yacht crab sideways into a berth.

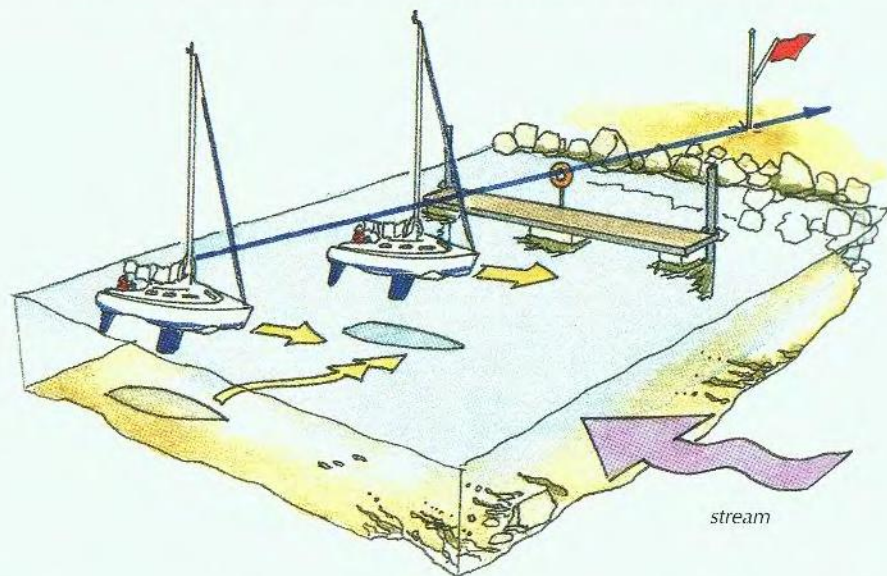


Stemming the stream is achieved by motoring into the stream so that the boat is not moving forwards or backwards - a transit abeam is used to check. To move sideways, keep the transit whilst steering slightly towards the pontoon. Water flowing over the rudder allows steerage and tide pushing on the bow moves the boat sideways.

Berthing with stream

Downstream berthing is difficult. As the boat slows it loses steerageway but it is still being swept towards the pontoon - out of control. If a downstream berth is approached, use the shallowest approach angle possible and get the stern line or an amidships line made fast quickly.


BEWARE

If the approach angle is not shallow enough this can happen.

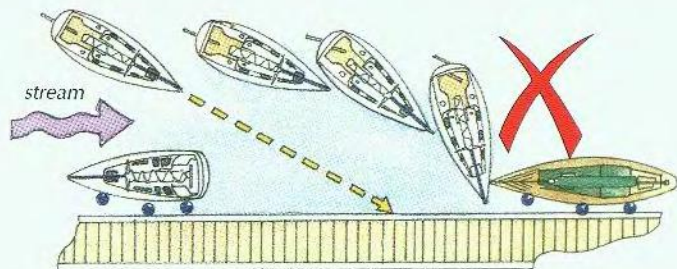

BERTHING

Mooring to a wall

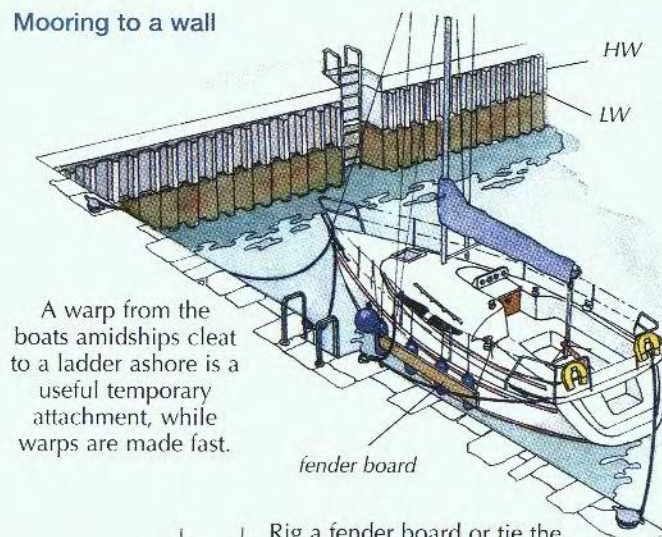

A warp from the boats amidships cleat to a ladder ashore is a useful temporary attachment, while warps are made fast.

Check there is sufficient depth at LW.

Warps should be adjustable from the boat.

If rise and fall of tidal height is expected; warp length should be three times the range of tide.




Rig a fender board or tie the fenders horizontally using an extra piece of line.

Rafting up

Ask the other boats their departure time. Rig fenders higher than for a pontoon.

Check that masts and spreaders will not touch.

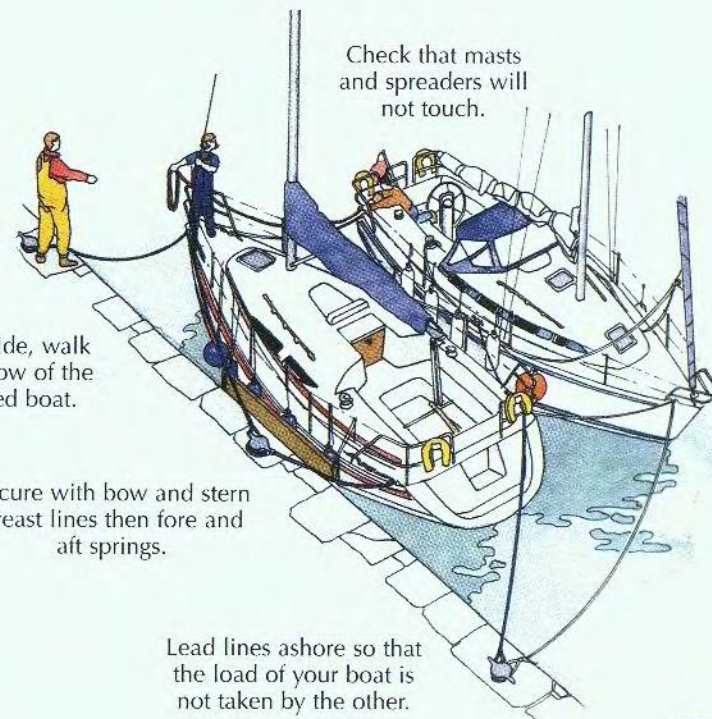


Once alongside, walk around the bow of the other moored boat.

Secure with bow and stern breast lines then fore and aft springs.


Lead lines ashore so that the load of your boat is not taken by the other.

LEAVING A BERTH

Plan the manoeuvre considering the affects of stream and wind. Brief the crew ensuring everyone knows their role.



Prepare a slip-line so that the short end is the one let go; this has the least chance of snagging.

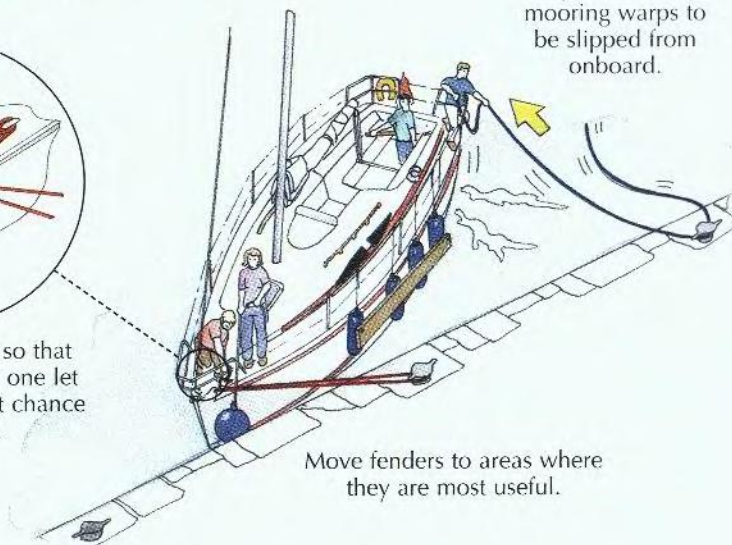

Slip-lines allow mooring warps to be slipped from onboard.

Move fenders to areas where they are most useful.


Leaving a raft

It is normal to slip out of a raft down stream. This enables the stream to help close the raft up again.

When the yacht has left, the motor cruiser pulls themselves back alongside and makes fast.

Motor cruiser crew ready to pull in the bow shore line.

New stern line led ashore – round the stern of the departing boat, ready to be hauled-in.

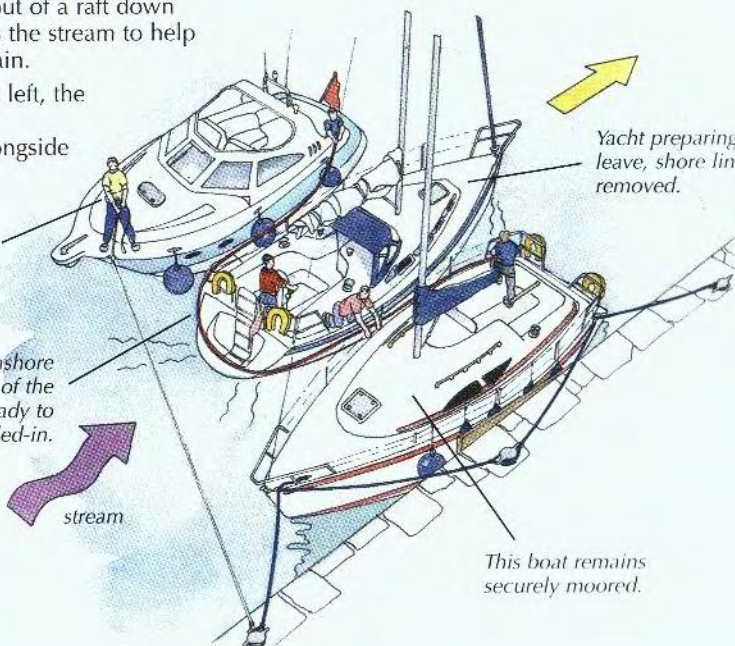


Yacht preparing to leave, shore lines removed.

This boat remains securely moored.

Leaving a finger berth

It is sometimes necessary to get the stern into clear water before reversing away. This will stop the fenders popping out or counteract an onshore wind.

A bow spring will take the stern away from the pontoon before reversing out.

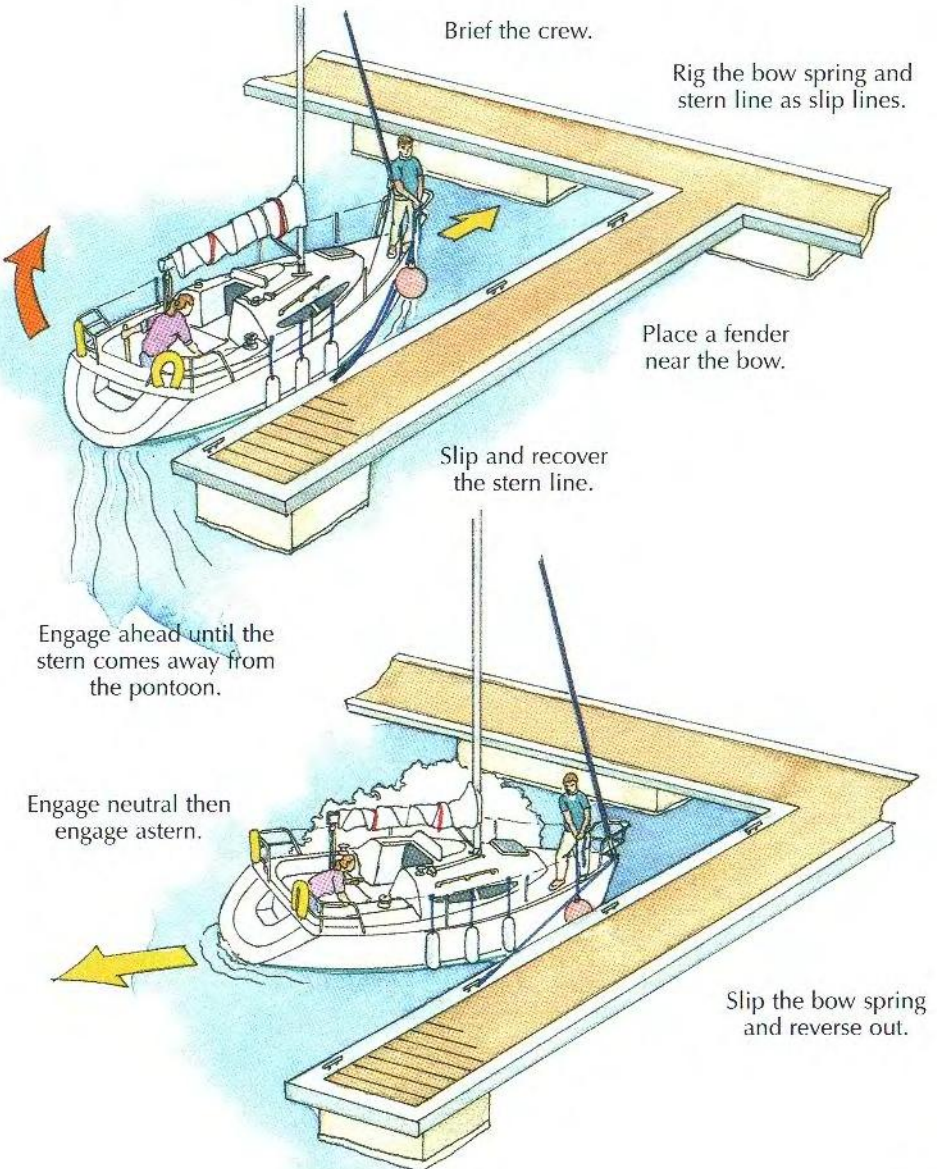


LEAVING A BERTH

Onshore wind with stream

An onshore wind usually requires the use of a spring to prise the boat off the pontoon. Whether a bow or stern spring is used is dictated by the direction of the stream.


Bow spring

If the stream is from astern use a bow spring.

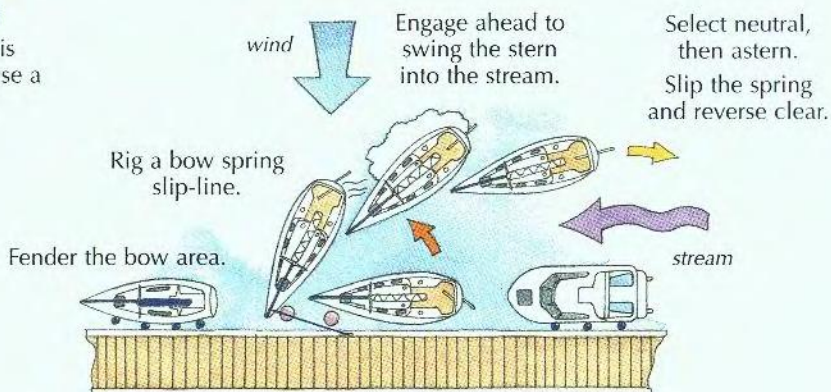


Stern spring

If the stream is from ahead use a stern spring.

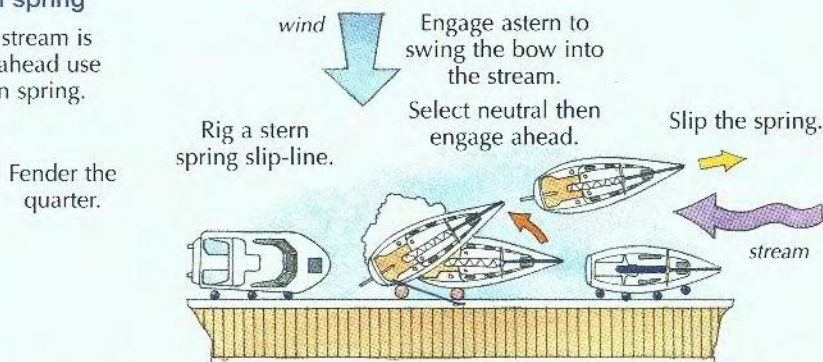

Offshore wind

The boat will blow clear of the berth and should not require springs.

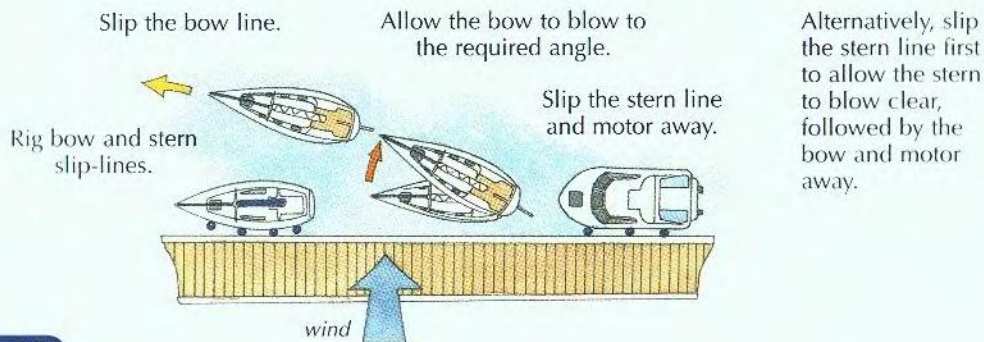

SCOPE AND SWINGING ROOM


Scope

Remember the basic principles. An anchor works best when the pull from the boat is closest to horizontal.

Check the depth and tidal range.


Use a scope (length) of anchor cable at least four times the depth for chain and six times the depth for rope/chain combinations.

If in doubt, let out more.

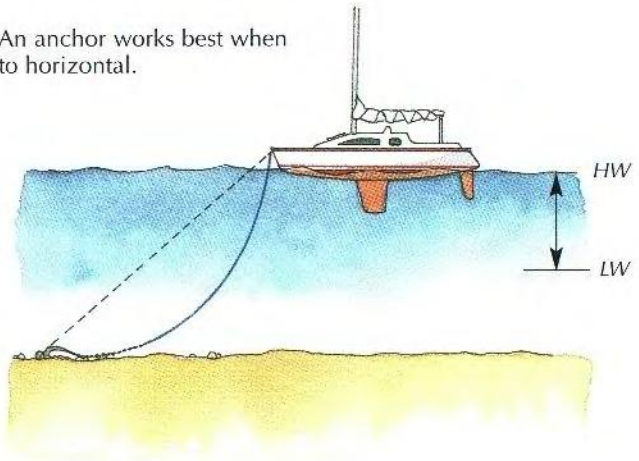

Swinging circle

More scope and low water will increase the swinging circle.

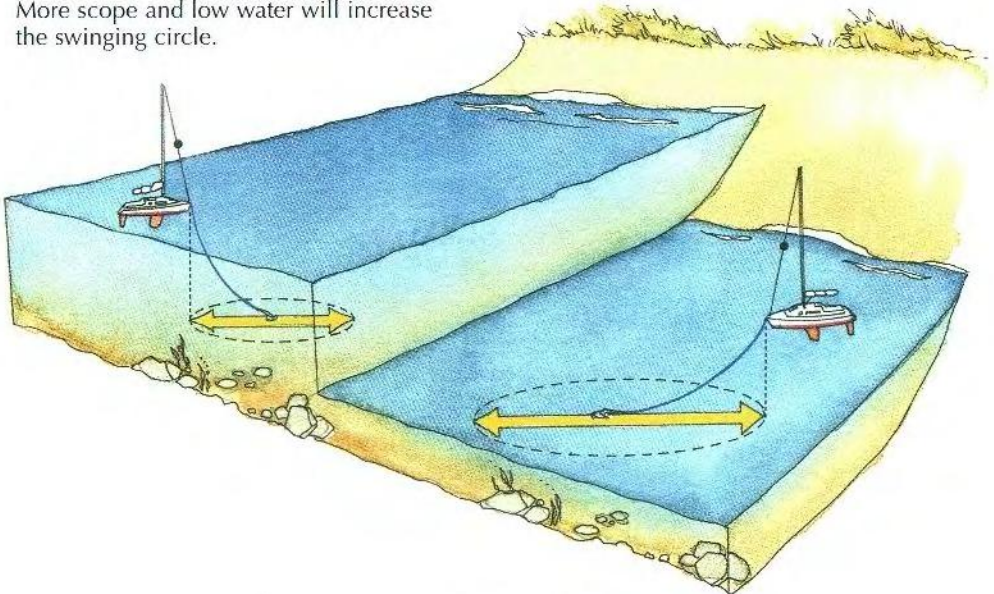


Ensure the maximum swinging circle clears obstructions.

ANCHORING

Dropping the anchor

Brief the crew on how to anchor. You may need to demonstrate the use of the windlass.

- 1 Approach into the wind or stream.
- 2 Drop the anchor and a third of the scope.
- 3 Drift back, or go astern slowly, paying out the scope.
- 4 Let the boat come to rest as the anchor bites.
- 5 Set the anchor with a short burst of astern power.

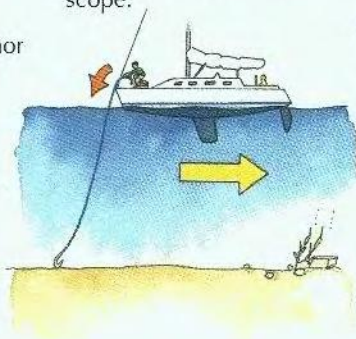

Are we holding?

Establish a transit to check that the boat is not dragging.


dragging



holding




Hoist the anchor ball or use an anchor light.

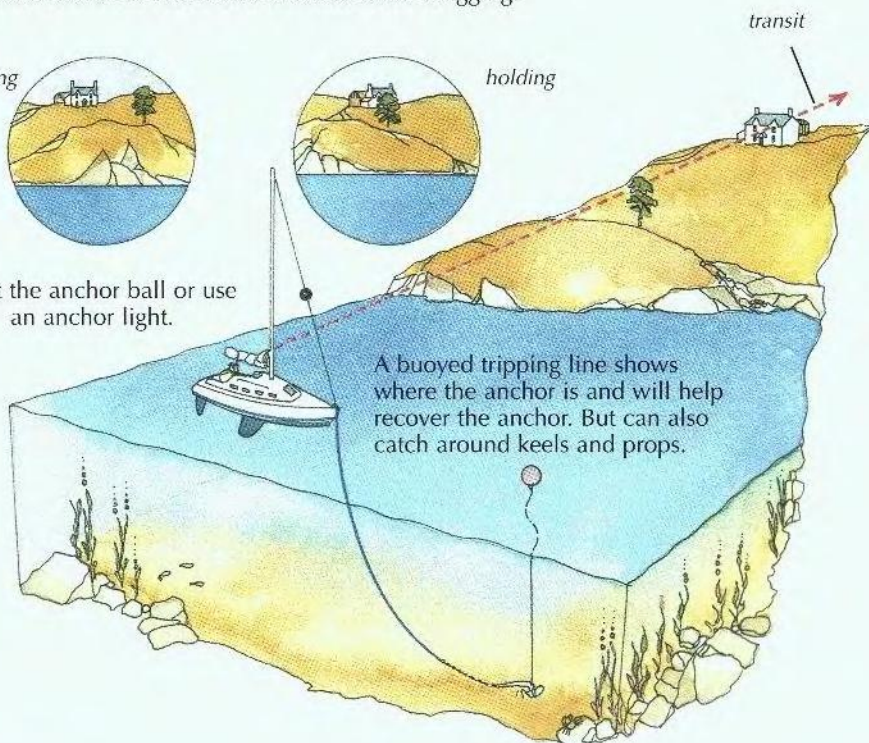

Raising the anchor


It is useful to know where the anchor lies when motoring up to it. Ask the crew to point to its location. If the anchorage is muddy, a bucket and brush may be required.

Normally the boat will be lying to either wind or tide.

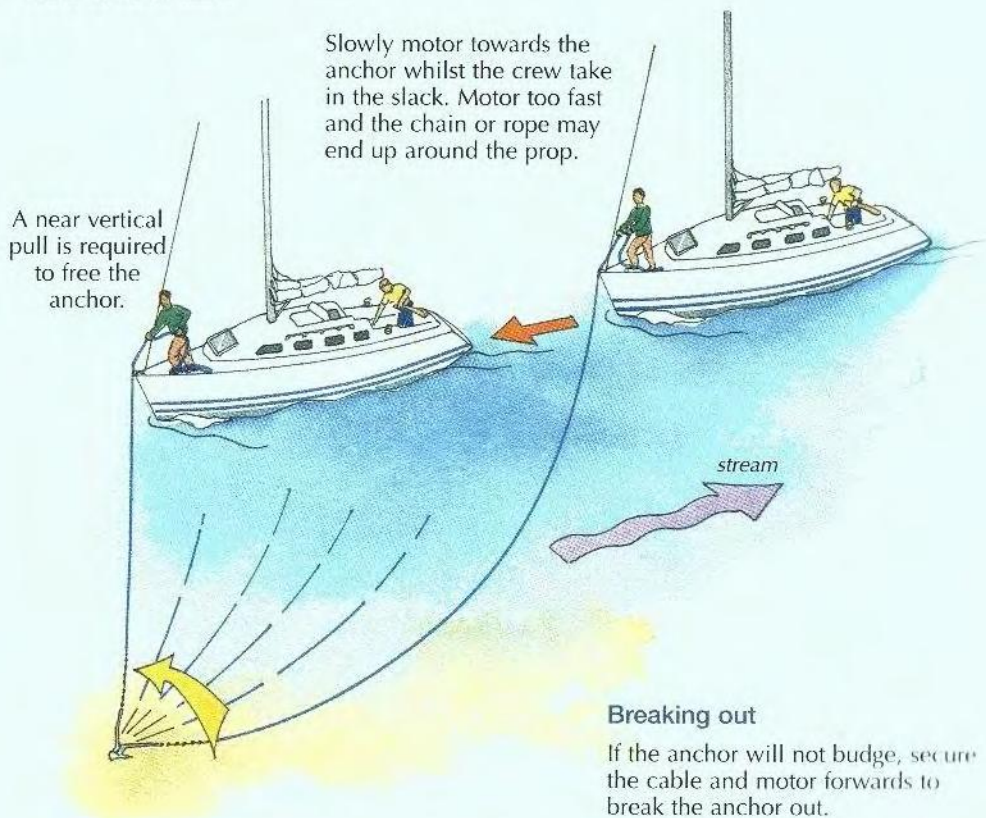

Breaking out


If the anchor will not budge, secure the cable and motor forwards to break the anchor out.

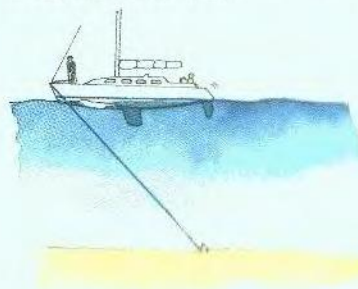

Stay in sheltered water while the anchor and chain is put away. Ensure the anchor and anchor locker is secure before putting to sea.

STERN AND BOW-TO MOORING

Many areas around the world berth bow or stern to a quay. An anchor or a line to a buoy is used to hold the yacht away from the quay.

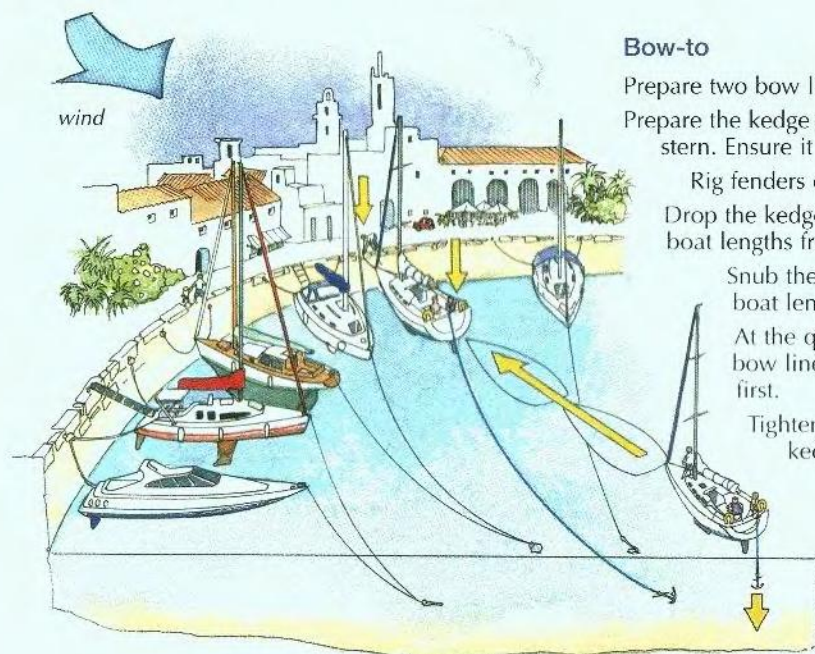

Bow-to

Prepare two bow lines and fenders.

Prepare the kedge anchor at the stern. Ensure it is tied on.

Rig fenders on both sides.

Drop the kedge three to four boat lengths from the quay.

Snub the anchor half a boat length out.


At the quay attach the bow lines - windward first.

Tighten in on the kedge.

Lazylines

Some harbours have lazylines secured to an underwater mooring instead of using an anchor.

The lazyline is picked up from the quayside on arrival and led aft. Twin bow lines secure the bow.

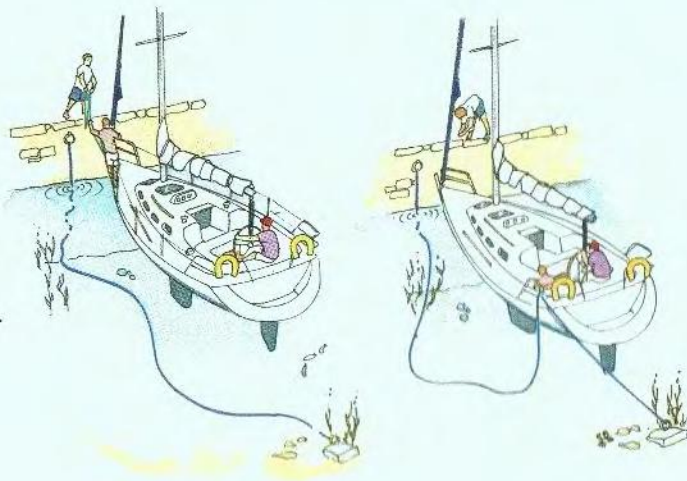

STERN AND BOW-TO MOORING

Stern-to offers easier access to the shore, but less privacy. Ensure there are no rocks close to the quay that could damage the rudder.

Stern-to

Rig two stern lines.

Fender both sides and the transom.


Prepare the anchor.

Reverse in and drop the anchor three to four boat lengths from the quay.

Snub the anchor half a boat length from the quay. Attach the stern lines.



Offshore wind

The stern seeks the wind on the approach - so drop the anchor and slowly reverse to the quay.

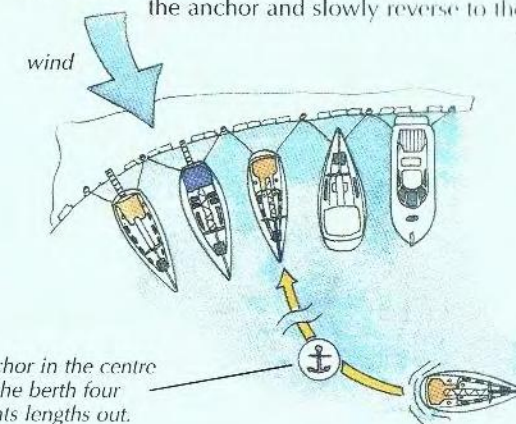

Onshore wind

Once the anchor is dropped it will hold the bow head to wind. Either ease back on the chain or reverse in.

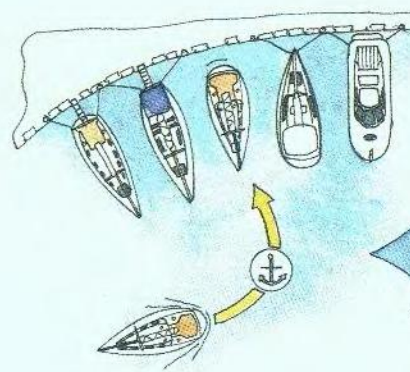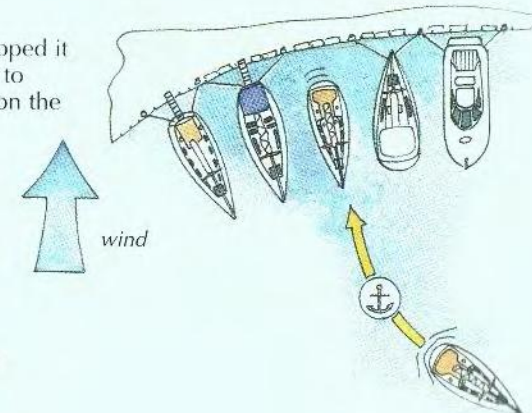

Crosswind

Keep momentum so the crosswind does not drift the boat to leeward. Initially you will lie alongside the downwind boat.

FIRST PRINCIPLES

The International Rules for the Prevention of Collision at Sea (IRPCS) are legally binding on all vessels and apply to all water users.

Additionally, local harbour by-laws cover speed limits, small craft channels and rules to regulate local marine environments.


The IRPCS rules require all vessels to maintain a lookout at all times.

Remember to look astern.

A sailboat has many blind spots so more vigilance is required.




All vessels have an absolute obligation to avoid a collision. This applies even if you are the stand on vessel, you must avoid a collision if the other vessel is not giving way.

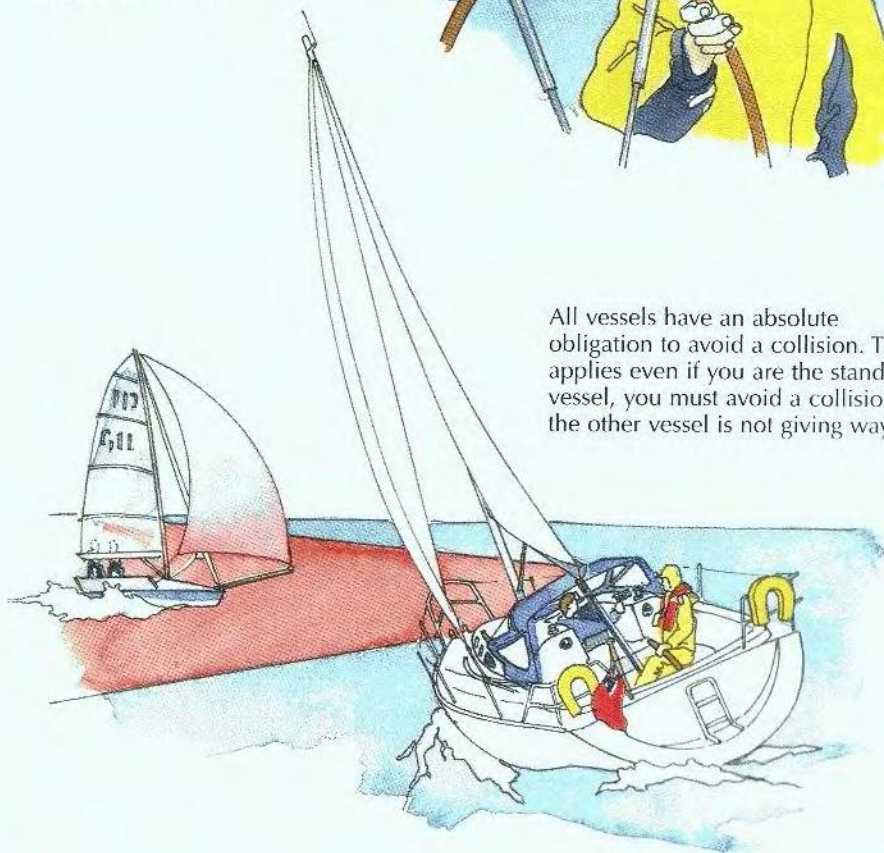


WILL WE COLLIDE

If another vessel is on a constant bearing then a risk of collision exists.

A handbearing compass can be used to check the bearing.

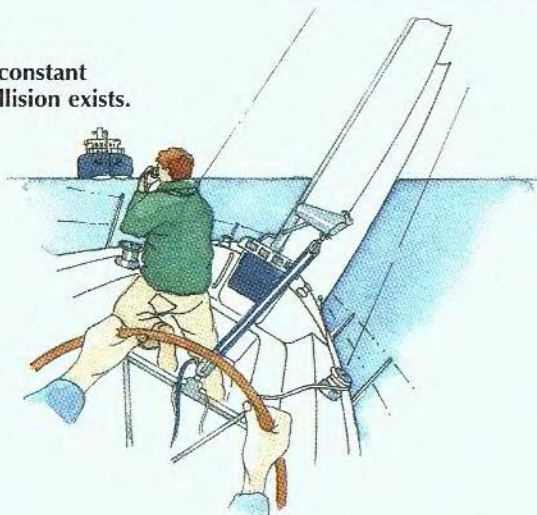


Or line up a stanchion with the other vessel to check if the relative bearing is constant.

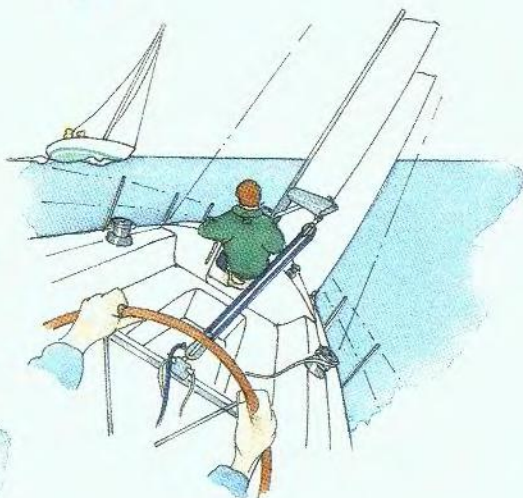

The starboard tack boat is the stand-on vessel but has it been seen by the boat with the spinnaker? Leave action too late and a collision may be unavoidable.


Make your intentions early and clear. A course alteration is always easier to spot than a speed alteration.

VESSELS IN SIGHT OF ONE ANOTHER

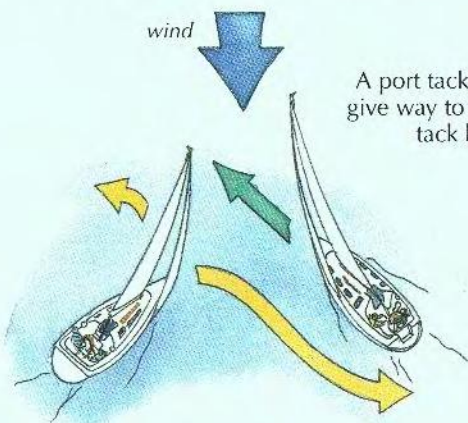


A port tack boat must give way to a starboard tack boat.

Keep a good lookout under the headsail.


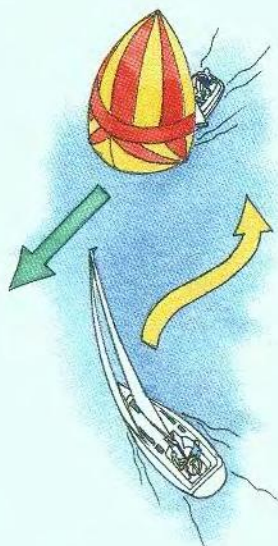


The windward boat must give way but is ignoring her obligations.

The starboard tack boat has to avoid a collision.

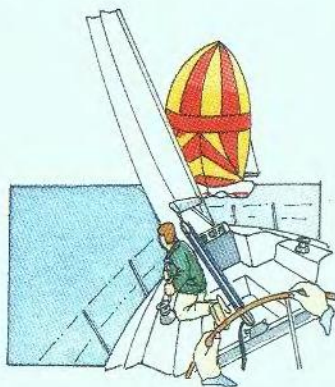


Two vessels under power meeting head-on. Both alter course to starboard.

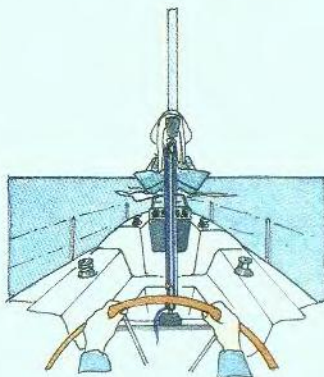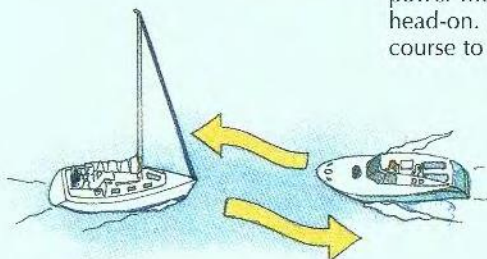


Two power driven vessels.

wind


The boat with the motoring cone has the other on her starboard bow and must give way.

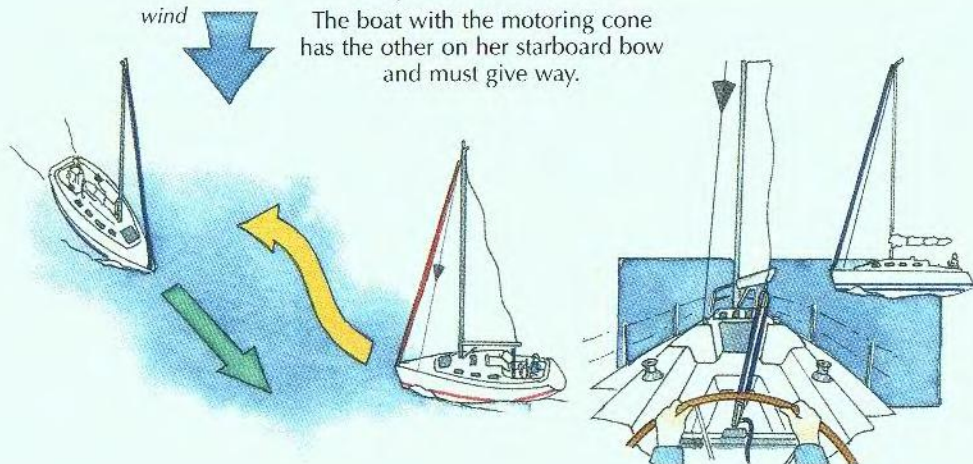

Power gives way to sail.
(see page 40)

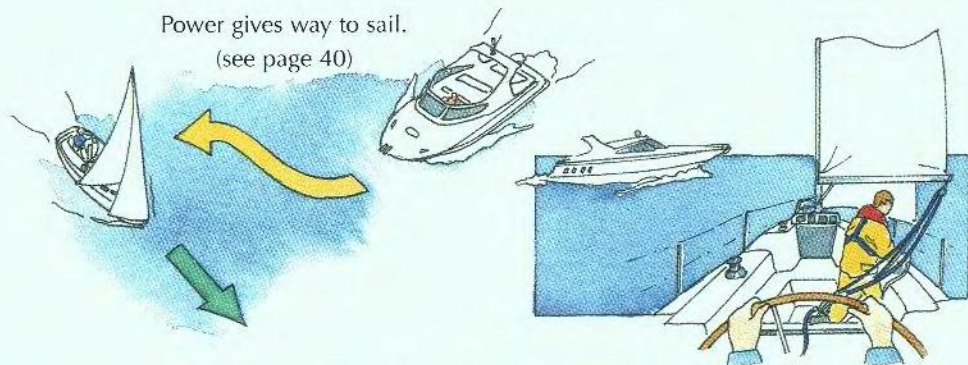


An overtaking boat must keep clear.

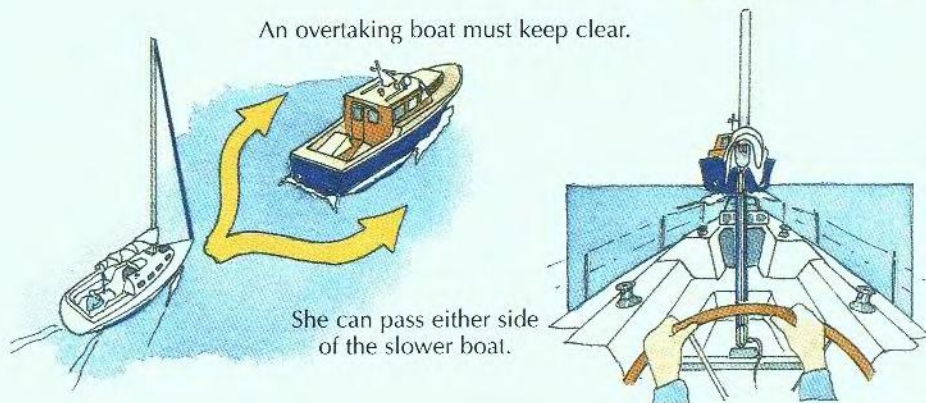


She can pass either side of the slower boat.


NARROW CHANNELS

Here is a typical narrow channel situation. The cargo vessel is in a narrow channel and constrained by her draught. It will expect all other smaller vessels to keep outside the marked channel.

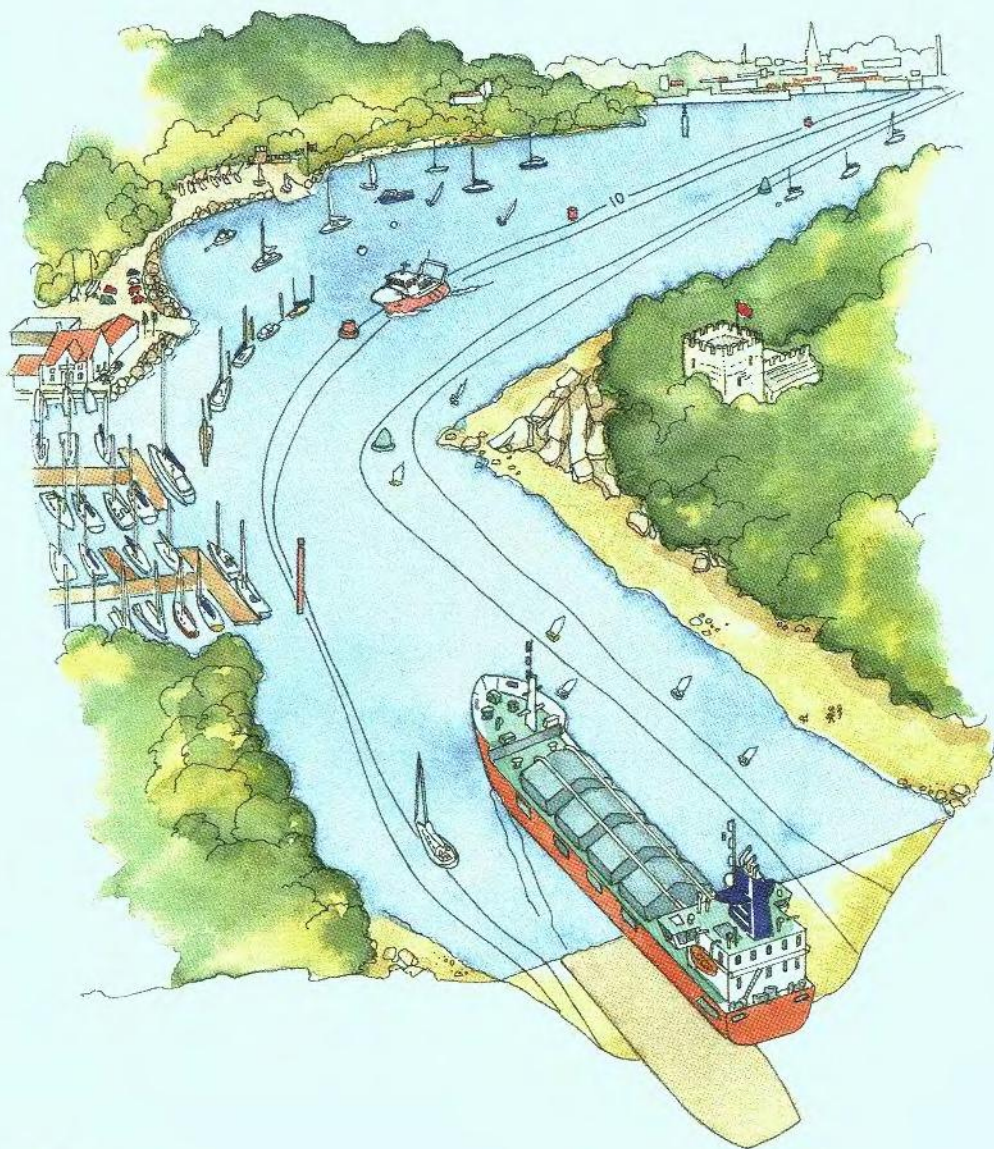

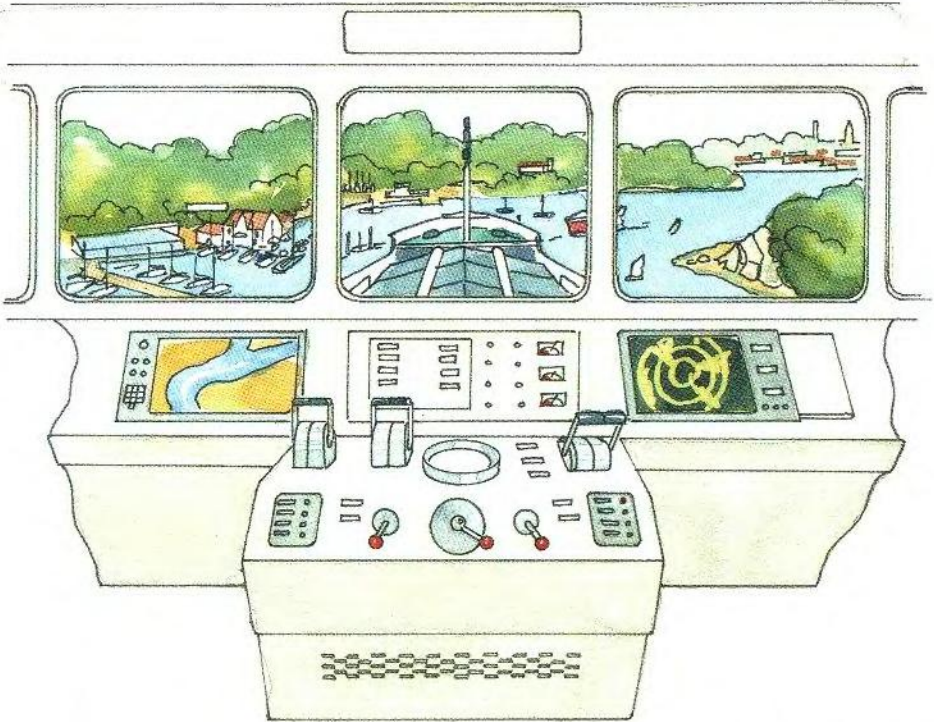

The vessel has a large turning circle and is slow to accelerate, decelerate and stop. Actions have to be planned well ahead and may be irreversible once taken.
 Visibility from the bridge is very limited.
 Prudent yacht skippers will keep well clear.

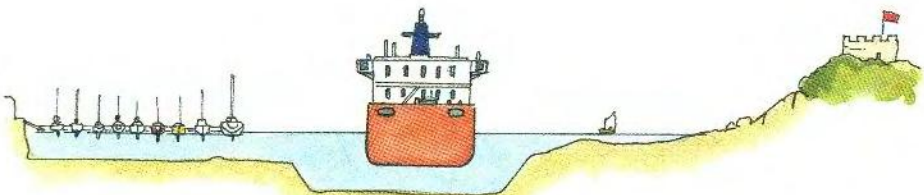


Imagine it is your boat that has a draught of ten metres. Now look at the chart again. A wide expanse of water suddenly looks like a very narrow channel.

HIERARCHY

There is a sensible pecking order built into the IRPCS. A more manoeuvrable vessel must not impede the passage of the less manoeuvrable one.


A small power vessel (including a sailing yacht under engine) is at the bottom of the pile.

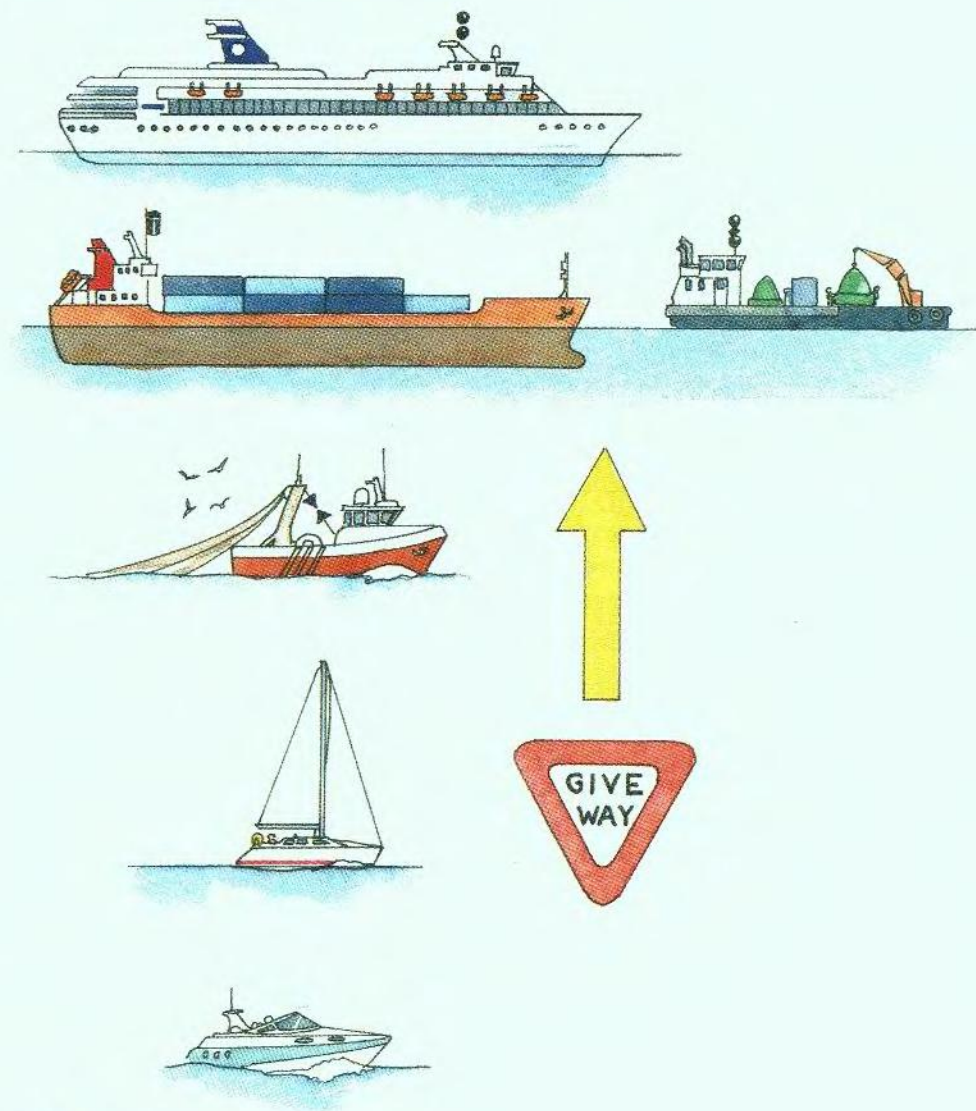


SOUND SIGNALS

Sound signals are used to indicate a vessel's intentions or concern about other vessels intentions.


Operating engines astern.

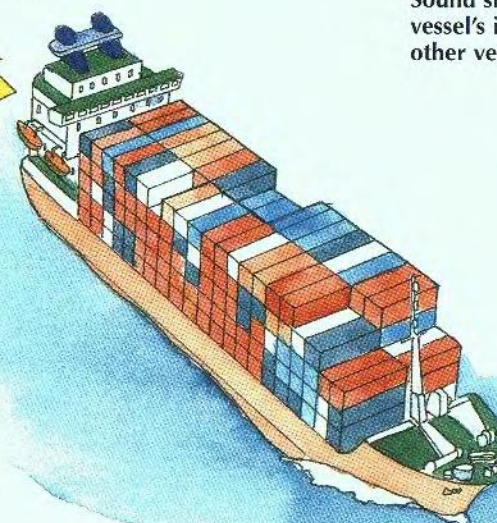


Turning to port.



Unsure of your intentions.



Turning to starboard.

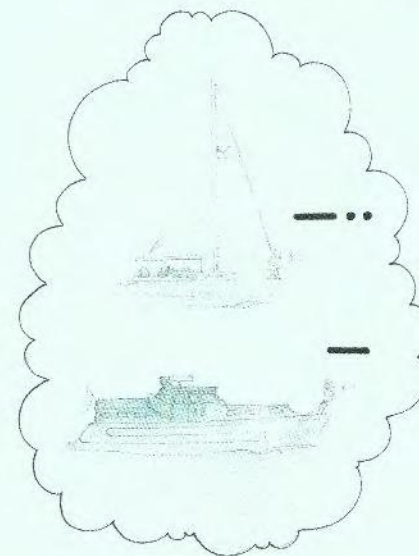

Restricted visibility

Keep clear of shipping lanes and channels when visibility is restricted.

Use the correct sound signal.

Large vessels may not hear your signals, seek shallow water.

Use radar if possible.

Vessels over 12m should carry a bell for use at anchor.

Good sail trim allows the boat to sail faster and more comfortably. This will make passages quicker and less tiring on the crew.

Broad reach -
starboard tack.

Close hauled -
starboard tack.

Run - port tack.
A preventer is rigged to stop
the boom gybing
accidentally.



No-go zone

Telltale on the headsail
indicate wind flow over the
sail. When close-hauled sail so
that the telltales on both sides
of the sail are flying nearly
horizontal.

Close hauled -
port tack.

too close to the wind
- steer away.

just right.

too far away from the
wind - steer up.

Beam reach
port tack.

Telltale on the leach of the mainsail are
adjusted by mainsheet and kicking strap
tension. The mainsheet adjusts the telltale
when sailing close hauled. The kicking
strap adjusts the telltale on a reach or run.

HEADSAIL CHANGES

Make sail changes easier for the crew. Heaving-to is a good way to drop a headsail or put in a reef as it steadies the yacht. If the yacht needs less sail, the crew need a harness.



Roller-furling headsail

Unfurling

Ease the furling line under tension, whilst pulling in on the headsail sheet.


Furling

Ease the sheet whilst hauling in on the furling line. Keep the sheet under a little tension to ensure a smooth furl.

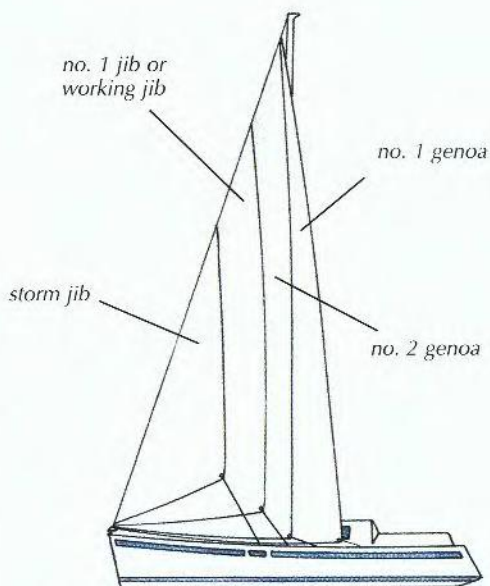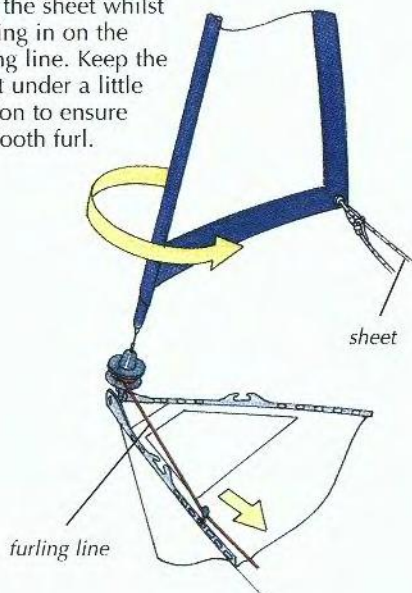


When you change the size of the headsail you will also need to change the position of the car (sheeting angle).

Hanked-on jib

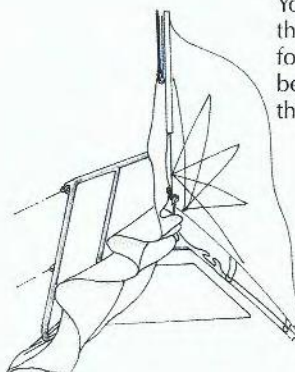

You can prepare the new headsail for hoisting before you drop the old one.

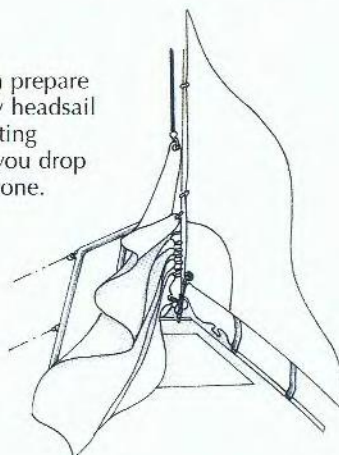


Dropping the headsail

1 Ease the halyard.


2 Pull down on the luff of the sail. Keep some tension on the jib sheet so neither the sail or the sheet go over the side.

Large headsails may need two people on the foredeck to control the sail.

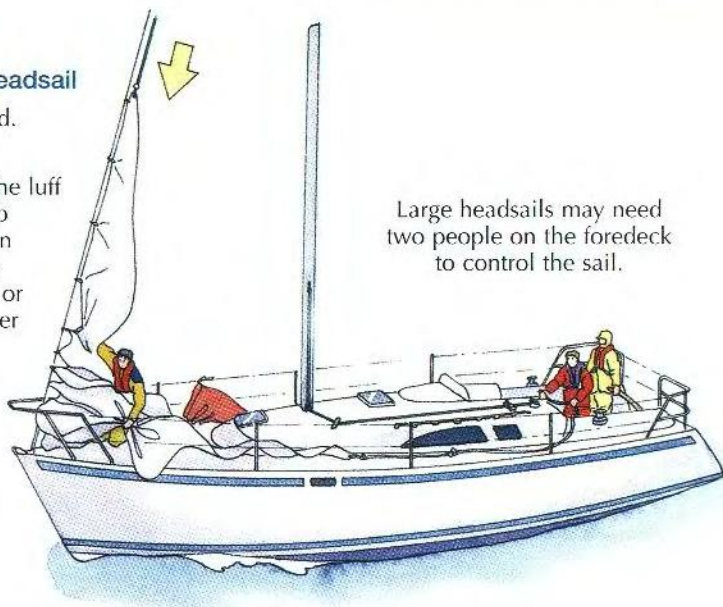


3 Remove the halyard from the sail and clip it onto the pulpit. Re-tension the halyard.

4 Pull the sail back and roll it so that it can be tied to the guard rail to use again.

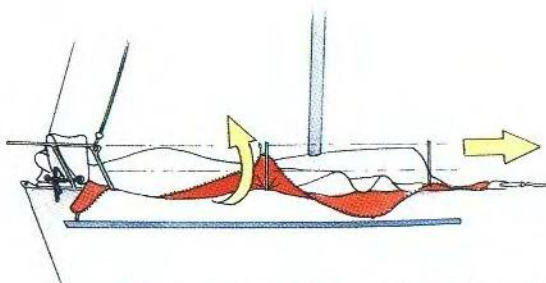


5 Or if not required again, fold it from the clew forward. Remove the hanks and stuff it into its sail bag.

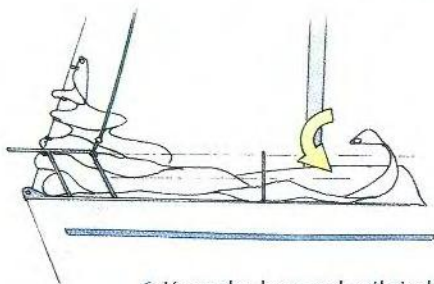

6 Keep the bag and sail tied in place.

7 Coil up and tidy all sheets and the halyard.



REEFING THE MAINSAIL

To make reefing easier, reduce heeling by easing the sails or heaving-to. If the crew need to go on deck, ensure they are harnessed on and use the windward side of the deck. Close the companionway hatch so the crew do not fall.




Too much sail on a windy day causes:-

- weather helm
- excessive heel
- slows the yacht
- broaching in gusts.

Reefing



- 1 Head the boat close-to but not straight into the wind.
- 2 Ease the kicking strap and mainsheet.
- 3 Raise the topping lift to take the weight of the boom and de-power the sail.
- 4 Ease the halyard. Pull the sail down and hook the luff cringle over the rams-horn.

5 Winch the halyard tight.





Trisail

A very small and strong sail rigged instead of the main in very strong winds.

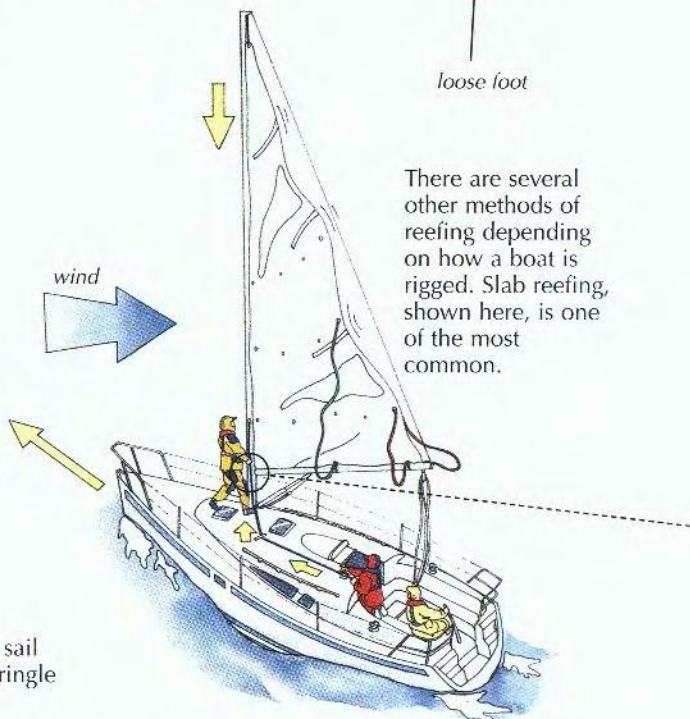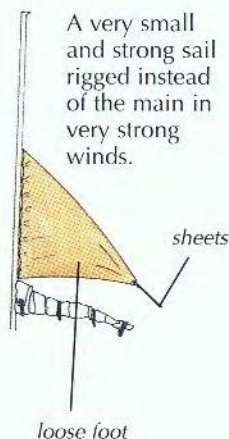


There are several other methods of reefing depending on how a boat is rigged. Slab reefing, shown here, is one of the most common.


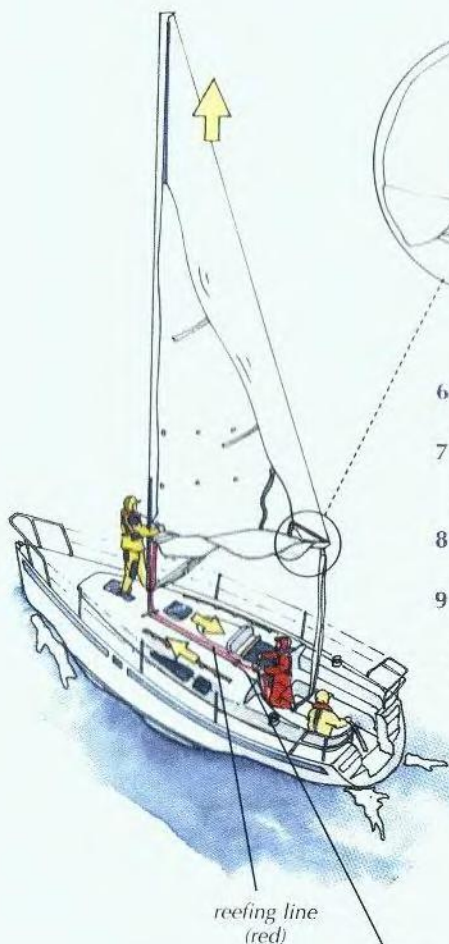


While the reefing pennant is being winched tight the sail must be flapping. Watch for jams.

- 6 Winch in the reefing pennant. Watch for jams.
- 7 Ease the topping lift and pull in the mainsheet and kicking strap.
- 8 Tidy the other reefing pennants and lines.
- 9 Put a sail tie through the clew and around the boom to reinforce the reef.



- 10 Tidy the sail onto the boom with sail ties using loosened reef knots or bows.

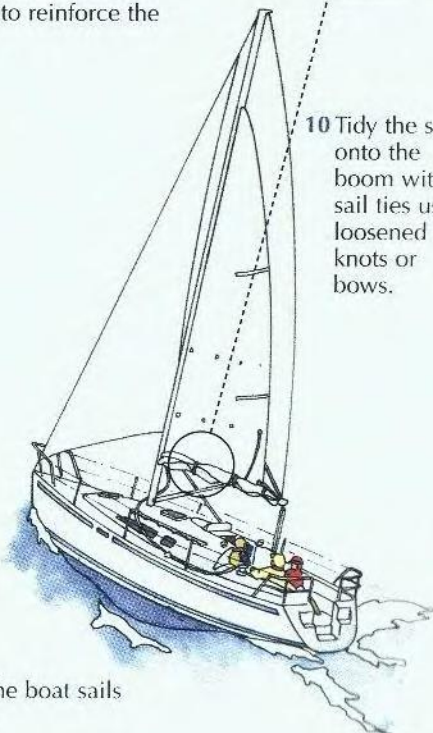

Now the sails are balanced in size the boat sails straight, fast and comfortably again.


MOORING BUOYS

Wind and stream should be taken into account when sailing up to a mooring buoy. The direction of wind and stream differ from one buoy to the next. If stream is present always moor into stream.

Decision making

Take a trial run past the buoy to; check the depth and the direction of wind and stream.

Decide which sail to use by; sailing past the buoy into stream, letting out both sails, whichever sail does not spill wind, take down and approach with the sail that will spill wind.




mainsail will not spill – take it down, approach under headsail.



if main and headsail flap, use both sails or just the mainsail.

Wind against stream


Approach downwind into the stream using the headsail. Control speed by furling most of the sail away or dropping it.

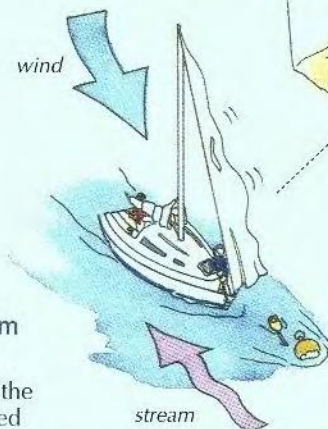

stream

Wind only

Sail up to the buoy on a close reach under mainsail. Ease the sail to slow down. In light wind, both sails may be required.

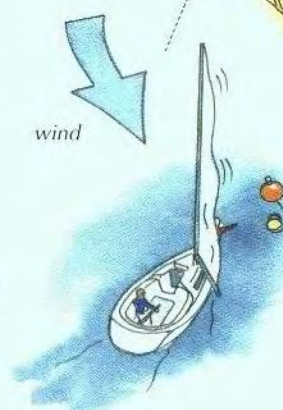

wind


Wind with stream

Approach on a close reach under mainsail using the tide as a brake and easing the sail to slow down.



wind

stream

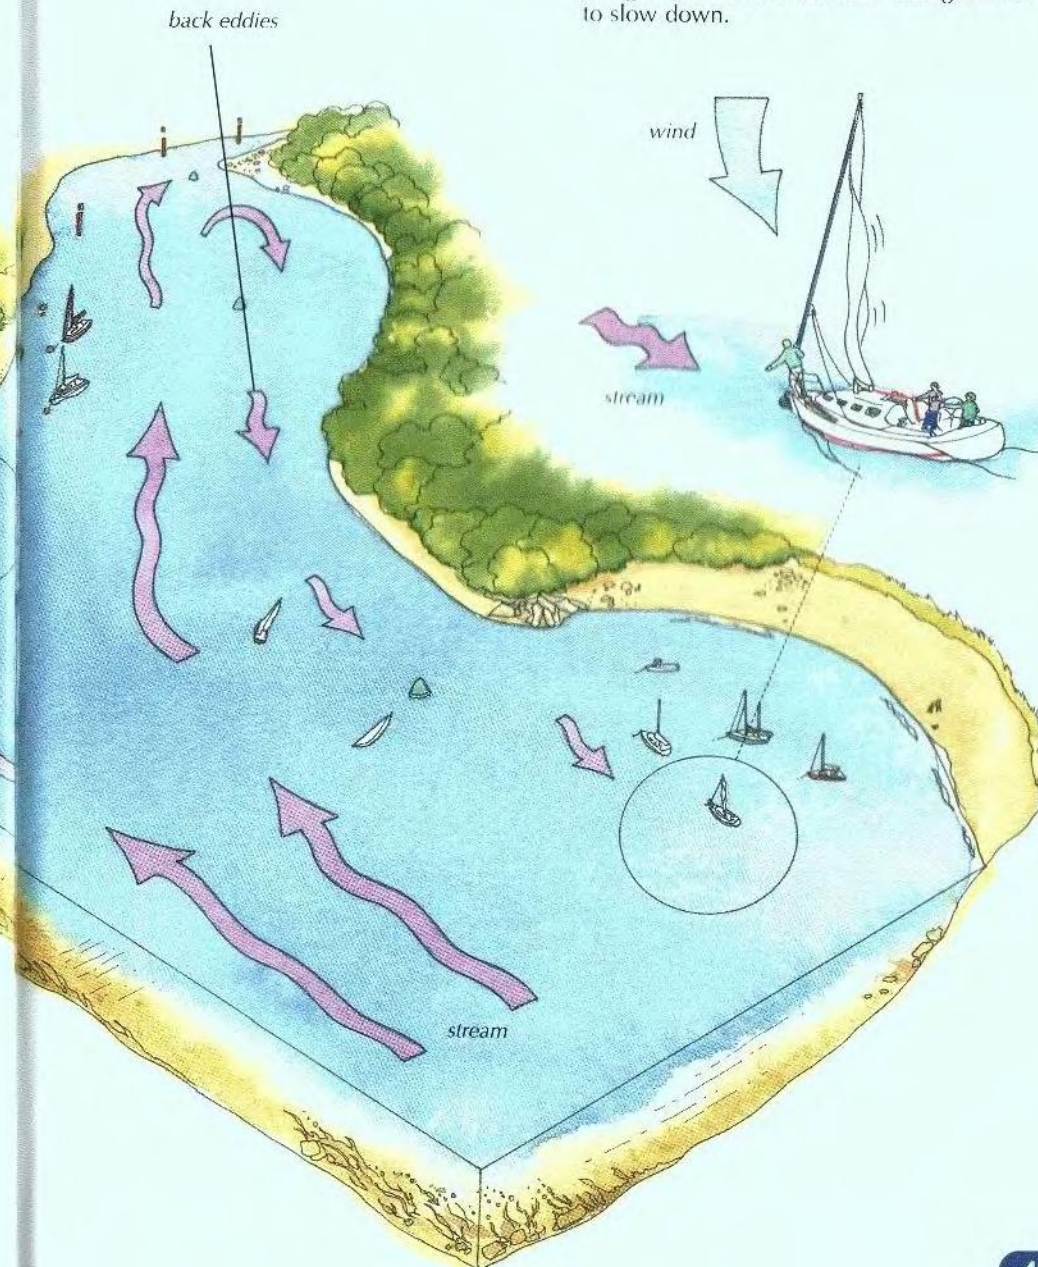

back eddies


wind

stream

CLOSE REACH – STRATEGY

Approach on a close reach (the blue sector in the diagram). This angle allows the mainsail to be eased (spilled) to slow the boat but will also allow it to be powered-up again (filled) if required.

On a beam or broad reach, the mainsail cannot be eased enough to spill the wind.

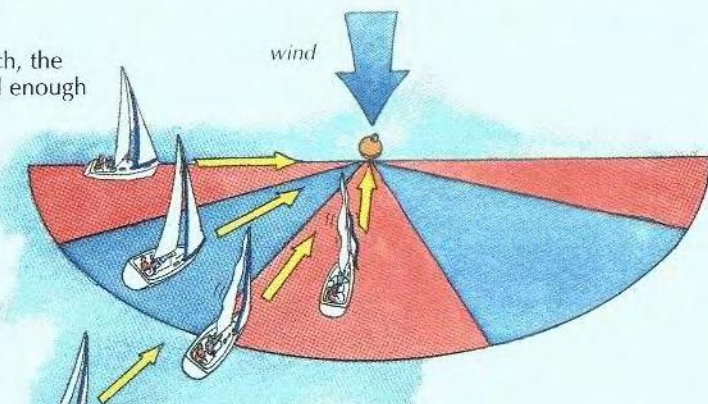

Approach with the wind too far forward and you may not get to the buoy.

If the yacht has sufficient power furl the jib to clear the foredeck.


Approach on a close reach.

Ease the mainsheet to check it spills.


Brief the crew to give distance and position of the buoy.

Filling and spilling

wind



To spill the sail, ease the mainsheet fully and drop the traveller to leeward.



To fill the sail, grab the falls of the mainsheet and lean back.




Aim slightly upwind on the approach to compensate for leeway get the buoy in transit with another fixed object.


Fill and spill the sail up to the buoy.



Pick up the buoy on the windward bow.




wind

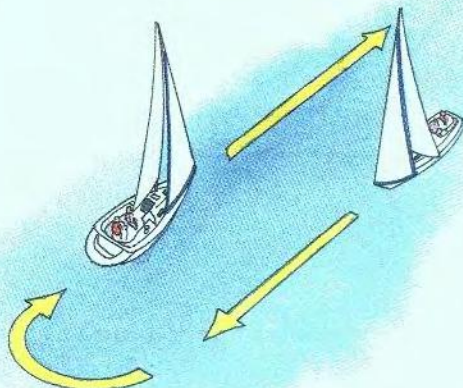

To judge the approach angle when there is little or no stream, sail past the mooring with the wind just aft of the beam. Tack onto your final approach and the wind will be just forward of the beam (a close reach).

WIND AND STREAM


When the wind is on or abaft the beam use the headsail to approach the buoy. It is sometimes possible to use no sail, just the windage of the boat.

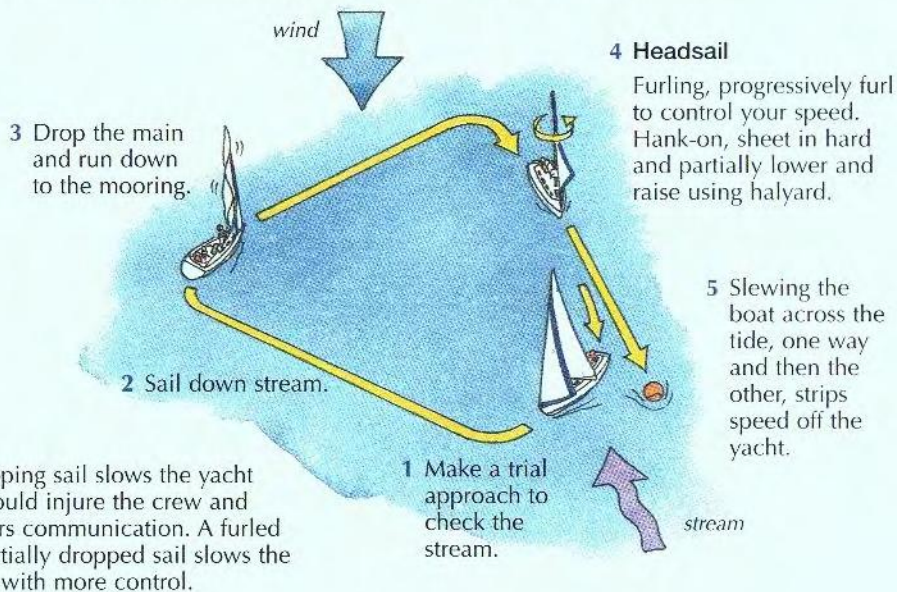

A flapping sail slows the yacht but could injure the crew and hinders communication. A furled or partially dropped sail slows the yacht with more control.


Beam wind approach

Start slightly further upwind to compensate for leeway. Slow by furling or partially dropping the headsail.

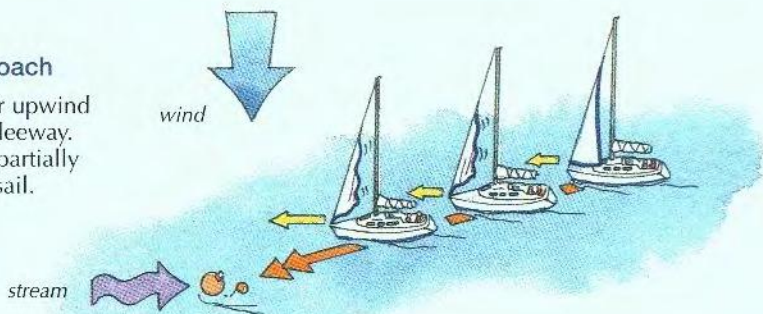

Windward pick-up


It is much easier and safer to pick up the buoy from the windward side so that it does not go under the boat.

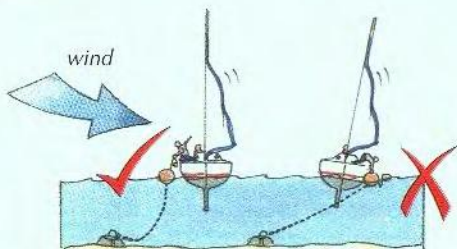

Anchoring under sail is easier than sailing up to a mooring because the anchor is dropped when the boat comes to rest. Give a clear brief and make a trial run to check the depth.

Wind with stream

Drop the headsail, prepare the main halyard and ready the anchor.

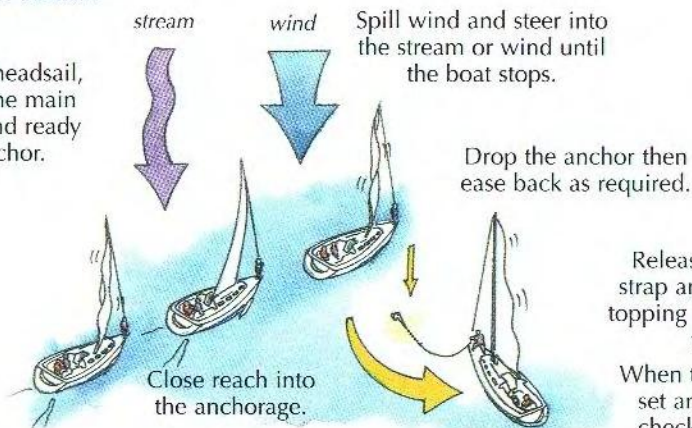


Release the kicking strap and hoist on the topping lift to de-power the sail.

When the anchor has set and a transit is checked, drop the mainsail.


Wind against stream

3 Bear away and adjust the headsail to keep a slow speed.

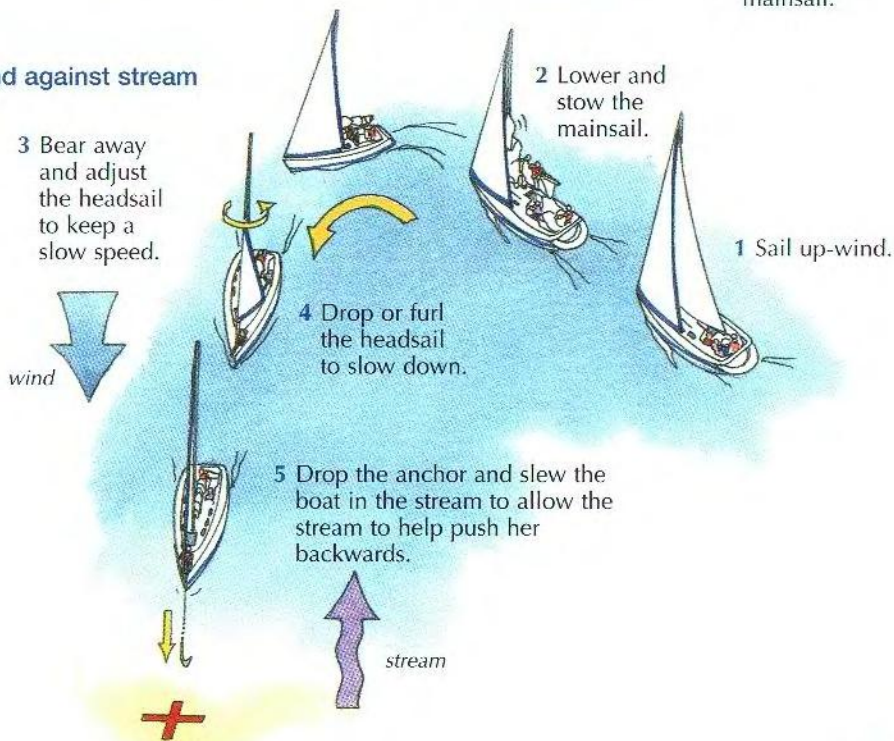

MAN OVERBOARD

The order of initial actions will depend on whether the MOB can be seen and whether the boat can turn straight away.



Initial Actions

- Shout "Man overboard".
- Spot the MOB.
- Throw a danbuoy to give a datum.
- Press MOB Enter button on the GPS.



- Sheet mainsail in hard.
- Go hove-to or sail back towards to MOB.
- Prepare a horseshoe or buoyancy.




A MOB is a Mayday or DSC Alert.

Secondary actions

- Furl headsail.
- Check for lines.
- Start engine and return to casualty.
- Give buoyancy.

The pick up

- Drive downwind while not losing sight of the casualty.
- Prepare a retrieval aid or lasso.
- Put a crew in a harness to help retrieval.
- Make the approach into wind.



- Sight the MOB through the shrouds to keep them away from the bow.
- Pick MOB up on the leeward side.

GETTING THE MOB ON BOARD




Getting a wet and fully clothed person aboard is not easy. Work out a method and discuss it with your crew so that they will know what to do.




A lasso maybe the easiest way to attach a line to a person in the water.

Muscles loose their strength very quickly in cold water - do not rely on any help from the MOB.



A halyard and two-speed winch or mainsheet will provide a solution.

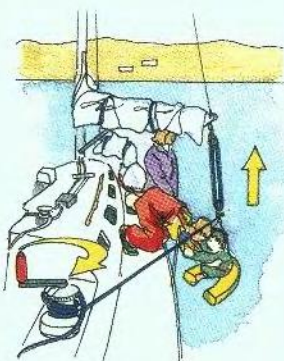

In calm conditions a boarding ladder may be easiest.

The casualty will be cold, shocked, frightened and may have swallowed salt water.
Change casualty into dry clothes.
Radio for medical advice.



Keep them warm. If possible place them in a sleeping bag.
Head for the nearest port.
Monitor their condition.

SENDING A DISTRESS MESSAGE

A Mayday call is for 'grave and imminent danger' to person or vessel.

Some yachts have VHF radios where all MAYDAY communication is by voice. Others have DSC/VHF radios (Digital Selective Calling) where the initial alert is made by pushing a red emergency button.

VHF/DSC alert

Press the red emergency button for five seconds to send the alert. The message will contain the vessels MMSI number (similar to a phone number), which may contain position and time. Follow up with a MAYDAY by voice.

Voice message

Select channel 16. Press the transmit button on microphone when speaking and remember to release it when you have finished.

MAYDAY CALL

"MAYDAY, MAYDAY, MAYDAY"

This is yacht Puffin, yacht Puffin, yacht Puffin
MAYDAY yacht Puffin"

MAYDAY MESSAGE

"MAYDAY yacht Puffin (MMSI)

In position (give latitude and longitude from GPS or position from a known point)

Nature of distress

Number of persons on board

Require immediate assistance

Other VITAL information (abandoning to liferaft/have no liferaft)


OVER"



FLARES


Buoyant orange smoke

Daylight use only.
Use within three miles of a rescuer.
Throw downwind.

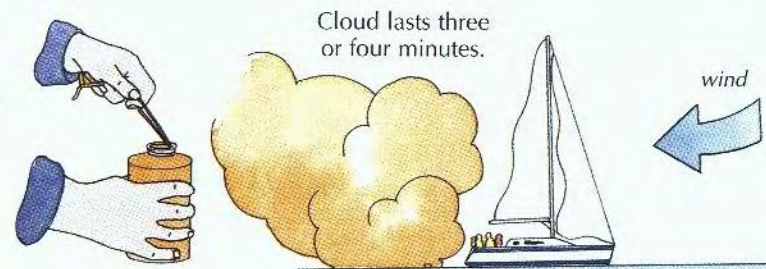

Orange hand-held smoke

Cloud lasts approximately one minute.

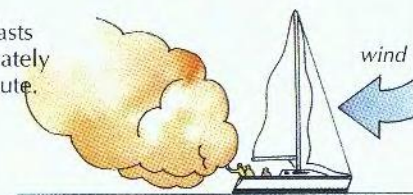


Orange smoke is easy for a rescue helicopter to see.

Red hand-held flare




Use day or night within three miles of a rescuer.

Hold the flare downwind and horizontally to protect your hands.

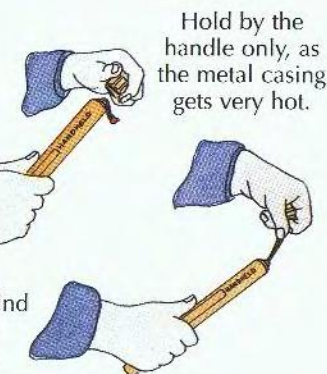


Red parachute rocket

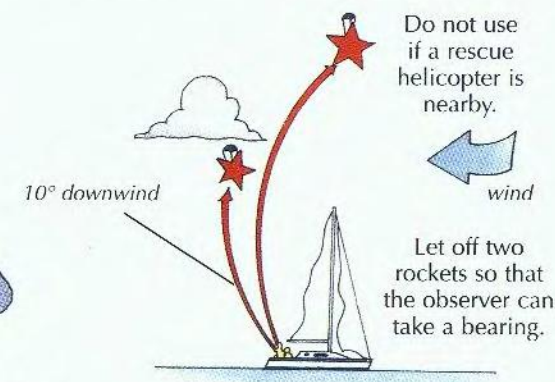



All brands of flare operate differently. Read the instructions before they are needed in a real emergency. Check flares are in date.

ABANDONING TO LIFERAFT

Only use the liferaft if there is no hope of saving the boat.
If possible, stay with the boat.




Liferafts are supplied in a canister or valise. A canister is stowed on deck and a valise is kept in a locker opening onto the deck.

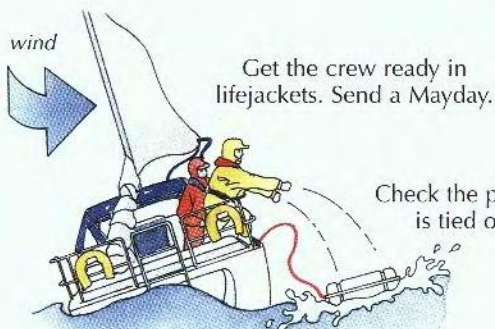

Get the crew ready in lifejackets. Send a Mayday.

Check the painter is tied on.

Launch the liferaft on the leeward side.

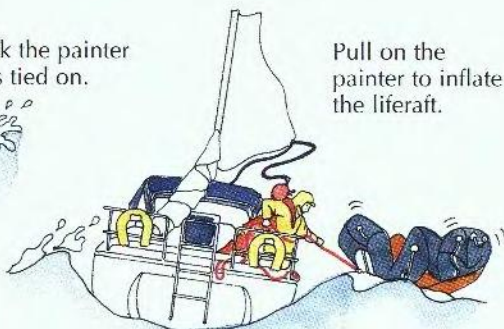

Pull on the painter to inflate the liferaft.



For stability get the heaviest adult into the liferaft first.



Climb into the raft, try to keep dry. Do not jump into the water.



Take extras; EPIRB, water, carbohydrate foods, first aid kit, warm clothes, sleeping bags, TPA (thermal protection aid) and a hand-held VHF.



Cut the painter and when clear, stream the drogue to increase stability and reduce drift. Keep dry and take anti-seasickness tablets. Ventilate the raft every 30 minutes.

The helicopter pilot will make contact by VHF and give a brief.
The brief may include a course and speed for you to follow.
Listen carefully and take notes.



It is important to steer a constant course without deviating.


A weighted line is lowered. Let it earth in the water to release static. Do not attach it to the boat.



Use the line to guide the helicopter winch-man. Gloves are useful.



The winchman will land on deck, unhook, and assess the situation.

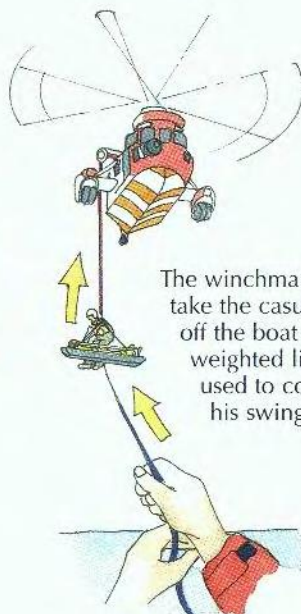

The winchman will take the casualty off the boat - the weighted line is used to control his swing.


SECURING A TOW

Tow astern

Tow another vessel from astern if you are at sea in open water.

Form bridles on both tug and tow to help spread the load, use cleats and winches.

Use a very long and shock absorbent tow line. A combination of anchor chain and heavy nylon is ideal - consider using the kedge equipment.

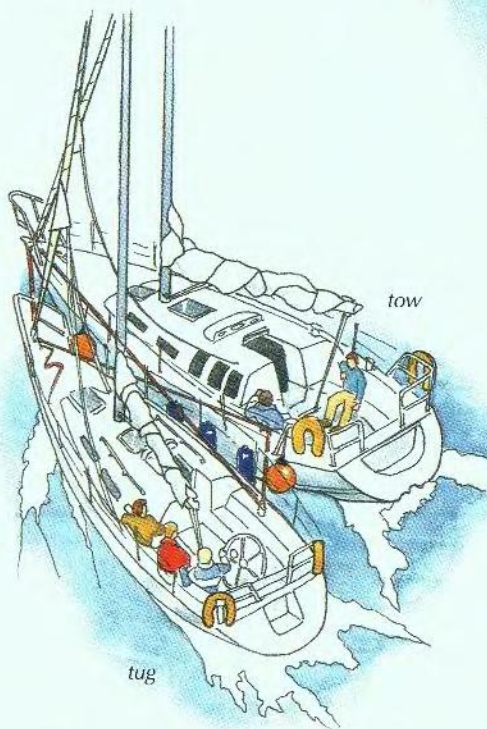


Alongside tow

Tow alongside when entering a harbour or when manoeuvring for greater control. To allow the tug to motor in a straight line with minimum rudder angle the tug into the towed boat.


Keep the tugs rudder in clear water.

Use springs to control fore and aft movement, lots of fenders are essential. Check that the masts will not touch.

Causes and action to take

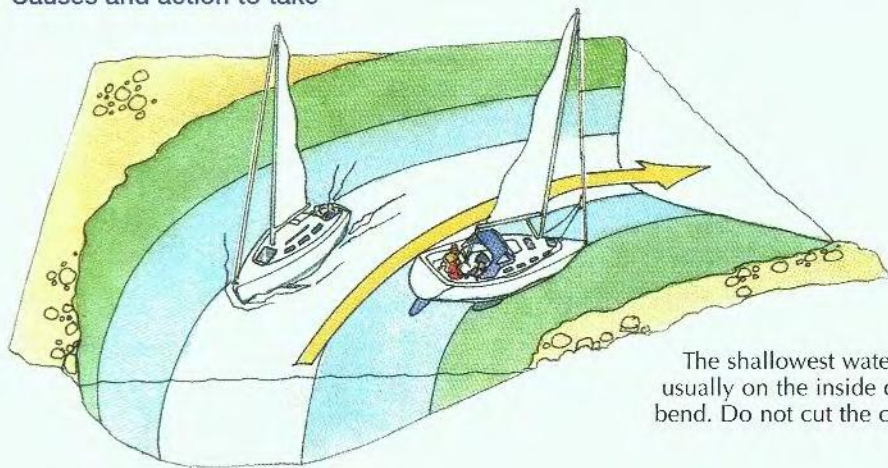

The shallowest water is usually on the inside of the bend. Do not cut the corner.

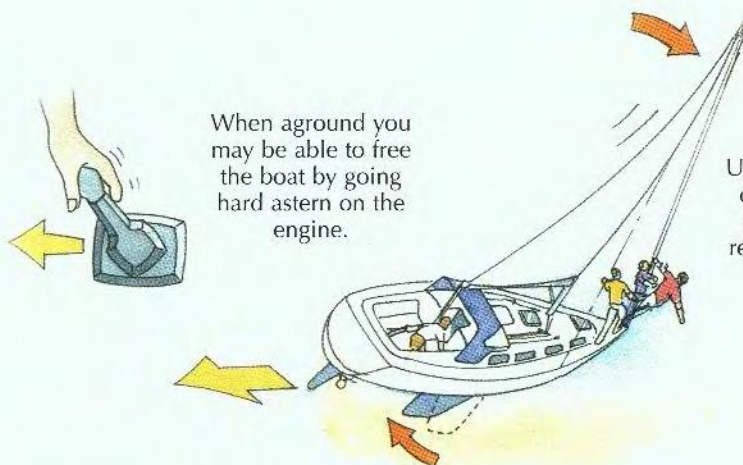

When aground you may be able to free the boat by going hard astern on the engine.

Use a combination of boat heel and crew weight to reduce the draft of the boat.

If you are unsure where deeper water lies, use a lead line.




If all the above fail, try going ahead with full rudder to pivot the boat on her keel and drive her into deeper water.



PLANNING A SHORT PASSAGE

When planning a passage consider these points;

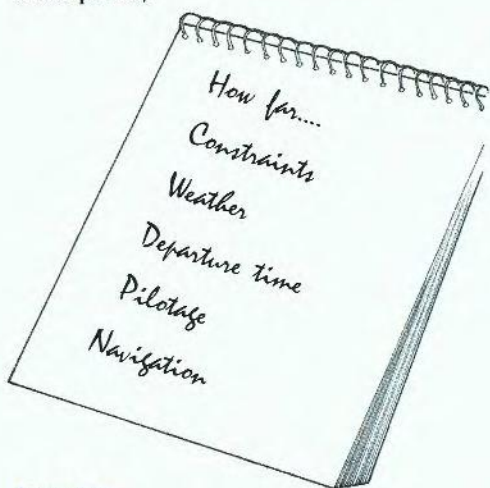

How far

Passage from Porth Dinlläen to Caernarfon:

Overall journey distance 17 Miles


Boat speed approx 5 Knots

Approximate journey time 3 1/2 Hours

Constraints

Check the chart and pilot books for constraints or tidal gates.

This passage has two tidal constraints.

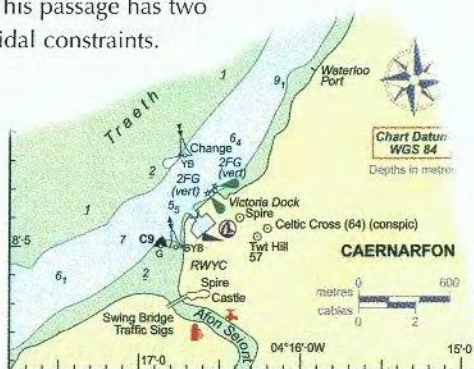

CAERNARFON 53°08'·51N 04°16'·83W

SHELTER Good in Victoria Dock marina, access HW±2 via gates, trfc lts; pontoons at SW end in 2m. Or in river hbr (S of con- castle), dries to mud/gravel, access HW±3 via swing bridge opening sound B (---). ↓ off Foel Ferry, with local or temp ↓ in fair holding off Abernarth. It strong stream.


1 The entrance to Caernarfon. The pilot book states Caernarfon is entered via gates and accessed HW ±2hrs.

Find out the time of HW for Caernarfon. (See *Day Skipper Shorebased Notes* for details of Primary and Secondary Ports).

2	Time	m
	07.16	0.6
Sa	12.50	5.0

LW 07.16 +1hr DST (Daylight Saving Time)

HW 12.50 +1hr DST



Caernarfon gates are accessed between 11.50 and 15.50


2 The Caernarfon Bar. A note on the chart states that the Bar should only be crossed HW ±3hrs.

DEPTHS

Depths in the entrance to the Menai Strait are continually changing. The buoys are moved accordingly. The entrance should only be used 3 hours either side of High Water. Information concerning the latest positions of the buoys can be obtained from the Harbour Master at Caernarfon.

The Bar is passable between 10.50 and 16.50.

PLANNING A SHORT PASSAGE

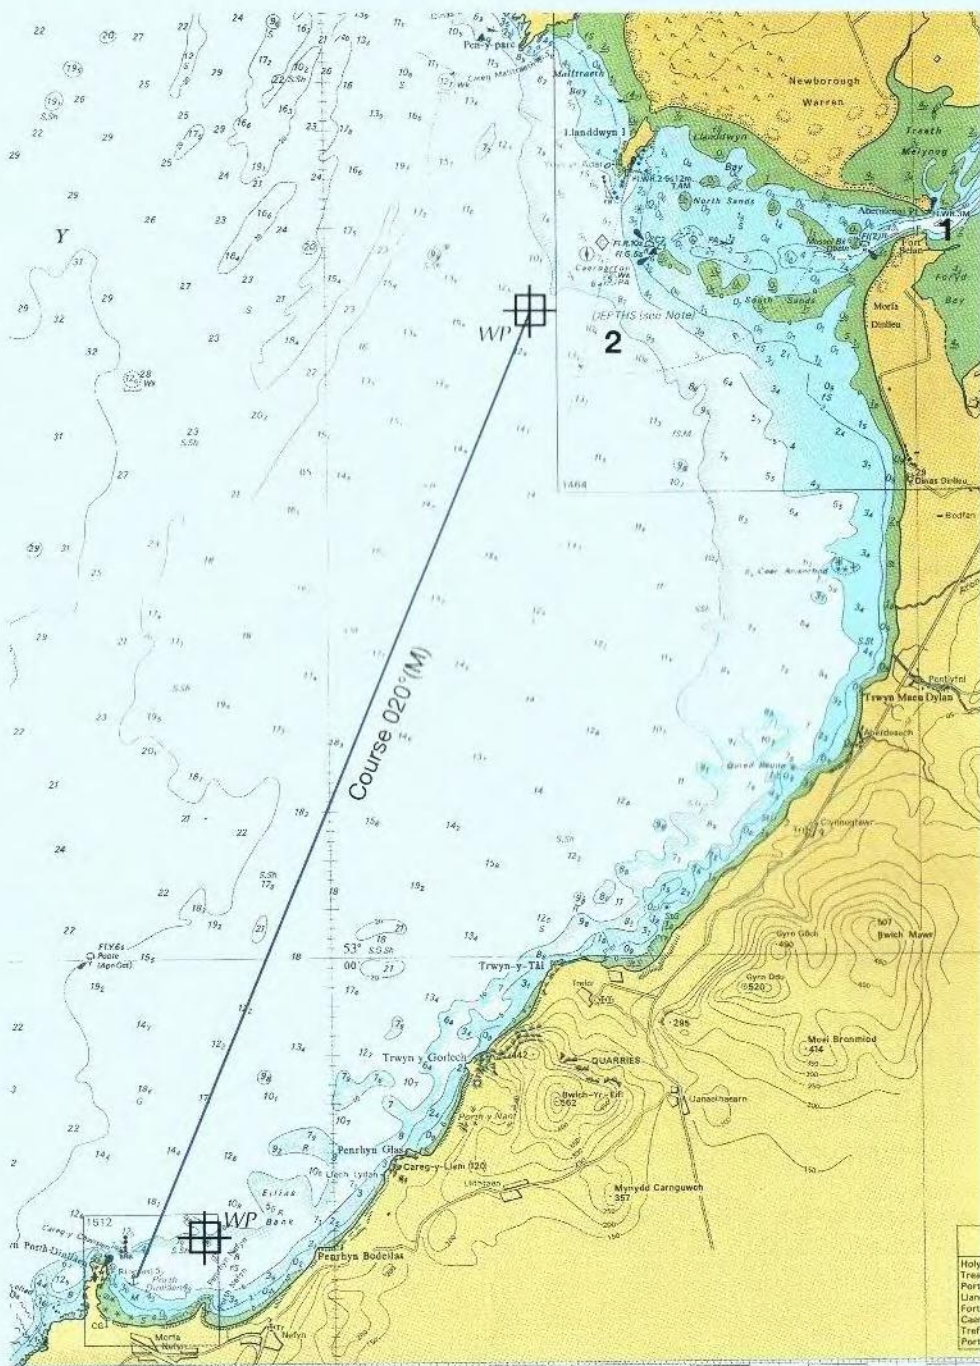


ESTIMATING TIME OF DEPARTURE

When will the tidal stream be favourable?


The distance from Porth Dinlläen to the Bar is 12 miles (2½ hours).

The distance from the Bar entrance to Caernarfon is 5 miles (1 hour).


Tides based on HW Caernarfon




5 hours before HW Caernarfon




4 hours before HW Caernarfon




3 hours before HW Caernarfon



2 hours before HW Caernarfon



1 hour before HW Caernarfon



HW Caernarfon

Use either a tidal atlas or tidal diamonds. A tidal atlas is easier to interpret.

The new incoming tide starts from Porth Dinlläen from about 0900 onwards.

To find the 'Time To Go' work backwards from the time we need to reach Caernarfon.

The tide starts to turn in the Straits at HW (1350) therefore we need to arrive earlier at 1300 with the last of the incoming tide.

Working backwards from Caernarfon;

- 1300 Arrive Caernarfon
- 1200 Entrance at the Bar
- 0930 Sails up - sailing out of Porth Dinlläen
- 0915 Anchor up

PILOTAGE

Plan the pilotage before you leave. This is easier done when stationary, than heeled over at 20 degrees and feeling seasick. Simplify the chart to the main points required for entry and exit, i.e. Porth Dinlläen, the Bar and Caernarfon require plans.

When piloting, let someone else helm, so you have time to look at the pilotage plan and to make decisions.


Speed; the boat should travel slower than the speed at which you can make decisions. Think two steps ahead; if you need to, slow down to assess the situation.

Porth Dinlläen Pilotage

Exiting Porth Dinlläen should be straightforward. Rocks to the north are well marked by an Isolated Danger mark.

The danger is the rock awash. To clear the rock awash we could:


- Place a waypoint on the rock and set a proximity/waypoint arrival alarm for 400 yards. If the alarm sounds, stop or alter course.
- Run a clearing line from the flag post on the Coast Guard lookout.
- Crossing the 10m depth contour will notify the clearance of the rock.

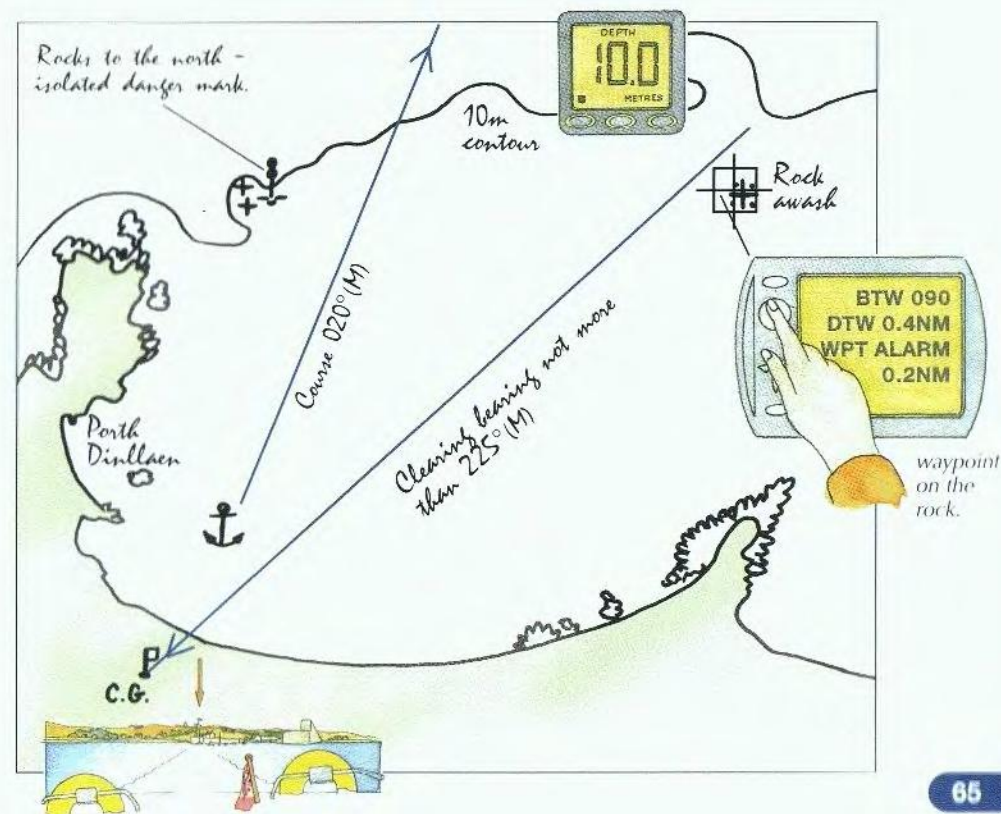


PLANNING A SHORT PASSAGE

Caernarfon bar pilotage

It is essential the boat stays in the narrow channel through the sandbanks. Even though the buoyed passage looks simple to follow, it is easy to miss a mark and drive onto a bank. Plot a course from buoy to buoy and cross them off as they are passed.

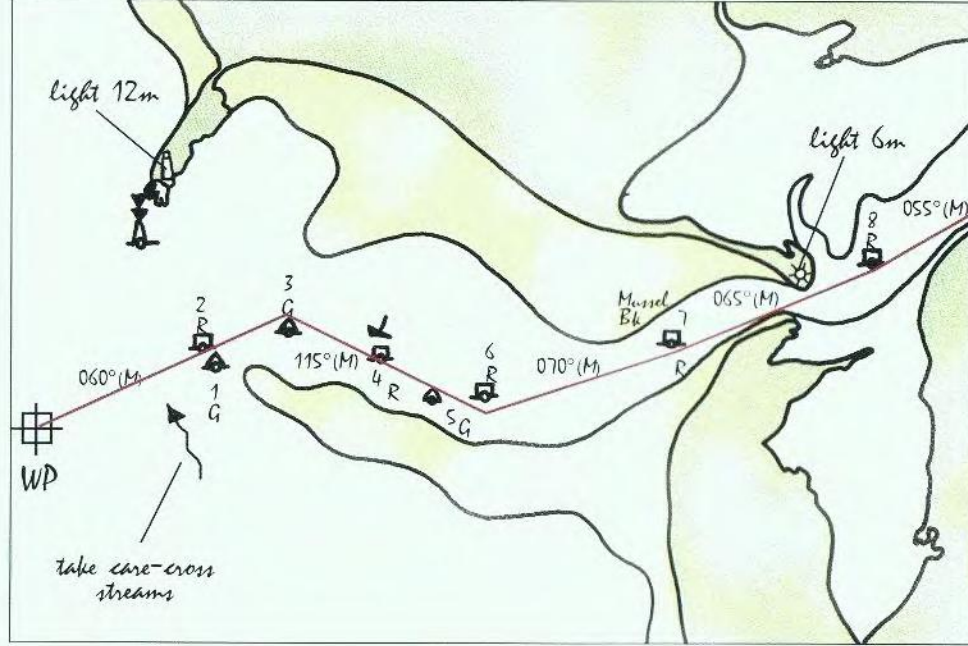

Watch for cross streams at a harbour entrance. The compass course could allow the boat to be swept onto a sandbank. Get the next buoy in transit with land behind it to keep a good course over ground. Draw expected cross streams on the plan as a reminder.

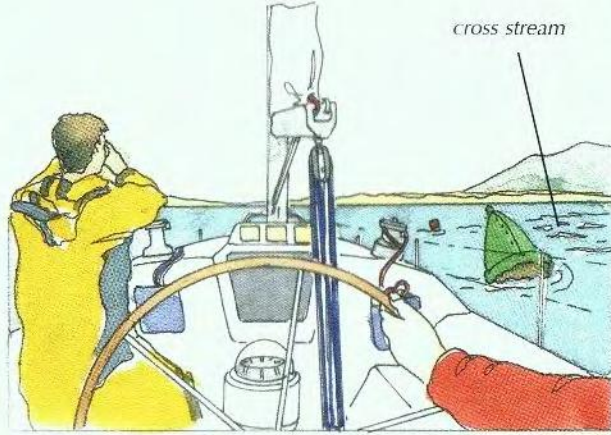

1 Important To help us comply with Data Protection legislation, please tick **either** Box A or Box B (you must tick Box A to ensure you receive the full benefits of RYA membership). The RYA will not pass your data to third parties.

- ☐ A. I wish to join the RYA and receive future information on member services, benefits (as listed in RYA Magazine and website) and offers.
☐ B. I wish to join the RYA but do not wish to receive future information on member services, benefits (as listed in RYA Magazine and website) and offers.

When completed, please send this form to: RYA, RYA House, Ensign Way, Hamble, Southampton, SO31 4YA

2		Forename		Surname		Date of Birth		Male		Female	
1.											
2.											
3.											
4.											
Address											
Town											
County											
Post Code											
Daytime Telephone											
Evening Telephone											
Signature: _____											
Date: _____											

3 Type of membership required: (Tick Box)

- ☐ **Personal** Current full annual rate £37 or £34 by Direct Debit
 From 1st October 2007 annual rate £39 or £36 by Direct Debit
☐ **Under 21** Current full annual rate £12 (no reduction for Direct Debit)
 From 1st October 2007 will be £13
☐ **Family*** Current full annual rate £56 or £52 by Direct Debit
 From 1st October 2007 annual rate £58 or £54 by Direct Debit
 * Family Membership: 2 adults plus any under 21s all living at the same address

- 4 Please tick ONE box to show your main boating interest.**
- | | |
|--|---|
| <input type="checkbox"/> Yacht Racing | <input type="checkbox"/> Yacht Cruising |
| <input type="checkbox"/> Dinghy Racing | <input type="checkbox"/> Dinghy Cruising |
| <input type="checkbox"/> Personal Watercraft | <input type="checkbox"/> Inland Waterways |
| <input type="checkbox"/> Powerboat Racing | <input type="checkbox"/> Windsurfing |
| <input type="checkbox"/> Motor Boating | <input type="checkbox"/> Sportsboats and RIBs |

Please see Direct Debit form overleaf

RYA Membership

Promoting and Protecting Boating

The RYA is the national organisation which represents the interests of everyone who goes boating for pleasure.



The greater the membership, the louder our voice when it comes to protecting members' interests.



Apply for membership today, and support the RYA, to help the RYA support you.



Benefits of Membership

- Access to expert advice on all aspects of boating from legal wrangles to training matters
- Special members' discounts on a range of products and services including boat insurance, books, videos and class certificates
- Free issue of certificates of competence, increasingly asked for by everyone from overseas governments to holiday companies, insurance underwriters to boat hirers
- Access to the wide range of RYA publications, including the quarterly magazine
- Third Party insurance for windsurfing members
- Free Internet access with RYA-Online
- Special discounts on AA membership
- Regular offers in RYA Magazine
- ...and much more



Join now - membership form opposite

Join online at **www.rya.org.uk**

Visit our website for information, advice, members' services and web shop.

PLANNING A SHORT PASSAGE

NAVIGATION


The forecast of SW 3 with long sunny periods should allow an easy sail and direct course up the Llyn Peninsula. A course to steer allowing for tide may need working up. (See *Day Skipper Shorebased Notes*).



Plot a waypoint for the Bar on the chart. Enter the waypoint into the GPS and double-check the data.



A useful technique is to draw a waypoint web on the chart so that your position from the waypoint is easily plotted.

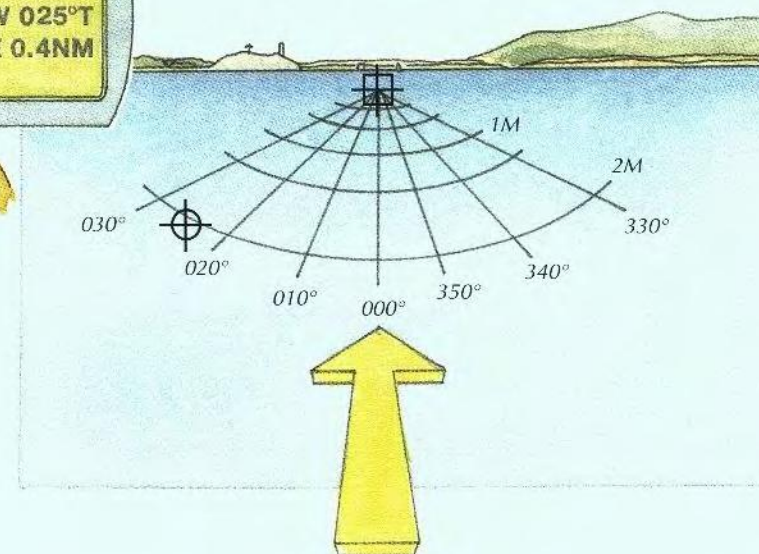

PLANNING A SHORT PASSAGE

RUNNING THE PASSAGE


Obtain the latest forecast. Be prepared to change your plans and stay in port. If the forecast is good, leave promptly. Hoist sails in the shelter of the land.



Delegate tasks, do not try and do everything yourself. This will keep everyone interested in the passage and allows them to learn too. Log your position every hour.



Successful arrival at Caernarfon, early due to a fair tide. Watch out for cross tides at the entrance. Consult the Pilot book for details on calling the harbour master.

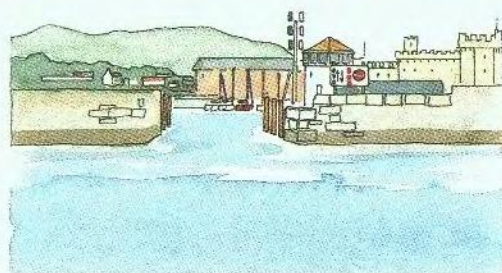


RYA Membership



Promoting and Protecting Boating
www.rya.org.uk

It is never advisable to set out in fog.
However if you are caught out:


Fix your position.

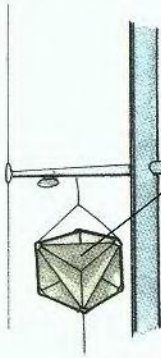

Hoist your radar reflector and switch on navigation lights.



Sound fog horn at intervals of 2 min (—) or (— . .) Listen.



Muster crew on deck in life jackets.

Listen on port frequency to check for commercial traffic.
If there is any likelihood of commercial shipping in your vicinity monitor channel 13 (bridge to bridge channel).




If you have radar keep a constant experienced radar watch.



Navigation strategy

- 1 Get out of shipping lanes.
- 2 Find and follow contour.
- 3 Consider anchoring in shallow water clear of traffic.

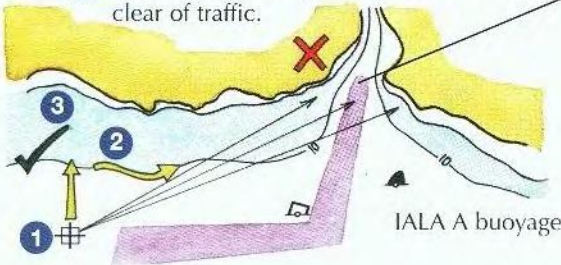


Where possible, do not set a course directly for the entrance to a port.

Error may take you to the wrong side putting yourself directly in the path of commercial vessels.


BEAUFORT FORCE

The Beaufort wind scale is the standard way to assess wind strength.

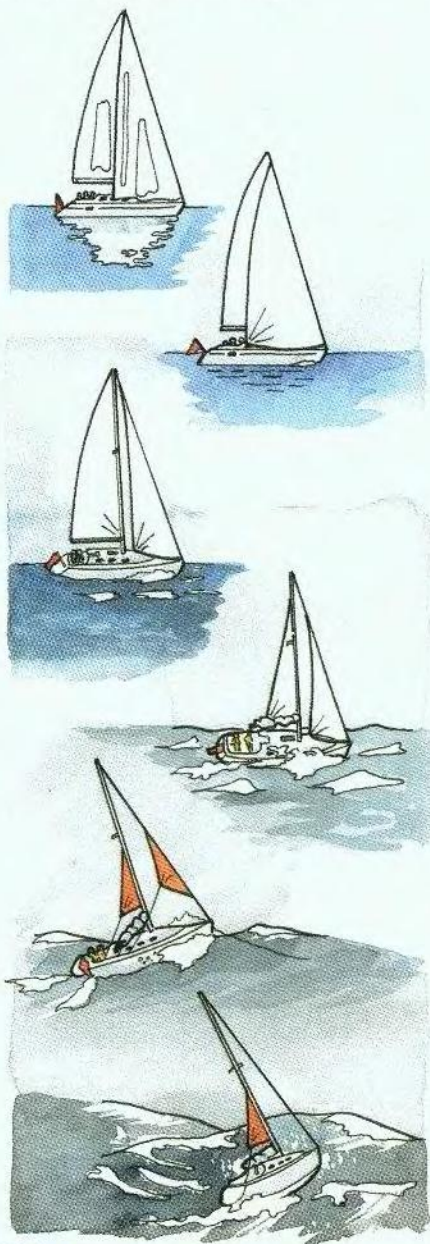


- 1** **Light airs** 1 - 3 knots.
Ripples.
Sail - drifting conditions.
- 2** **Light breeze** 4 - 6 knots.
Small wavelets.
Sail - full mainsail and large genoa.
- 3** **Gentle breeze** 7 - 10 knots.
Occasional crests.
Sail - full sail.
- 4** **Moderate** 11 - 16 knots.
Frequent white horses.
Sail - reduce headsail size.
- 5** **Fresh breeze** 17 - 21 knots.
Moderate waves, many white crests.
Sail - reef mainsail.
- 6** **Strong breeze** 22 - 27 knots.
Large waves, white foam crests.
Sail - reef main and reduce headsail.
- 7** **Near gale** 28 - 33 knots.
Sea heaps up, spray, breaking waves, foam blows in streaks.
Sail - deep reefed main, small jib.
- 8** **Gale** 34 - 40 knots.
Moderately high waves, breaking crests.
Sail - deep reefed main, storm jib.
- 9** **Severe gale** 41 - 47 knots.
High waves, spray affects visibility.
Sail - trysail and storm jib.
- 10** **Storm** 48 - 55 knots.
Very high waves, long breaking crests.
Survival conditions.

NORTHERN HEMISPHERE

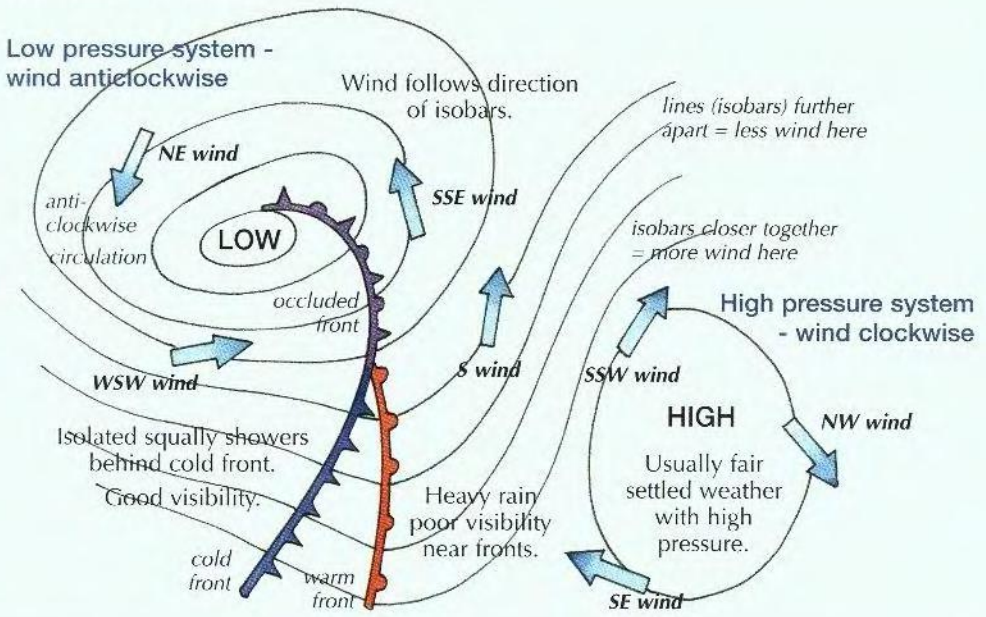


SOUTHERN HEMISPHERE

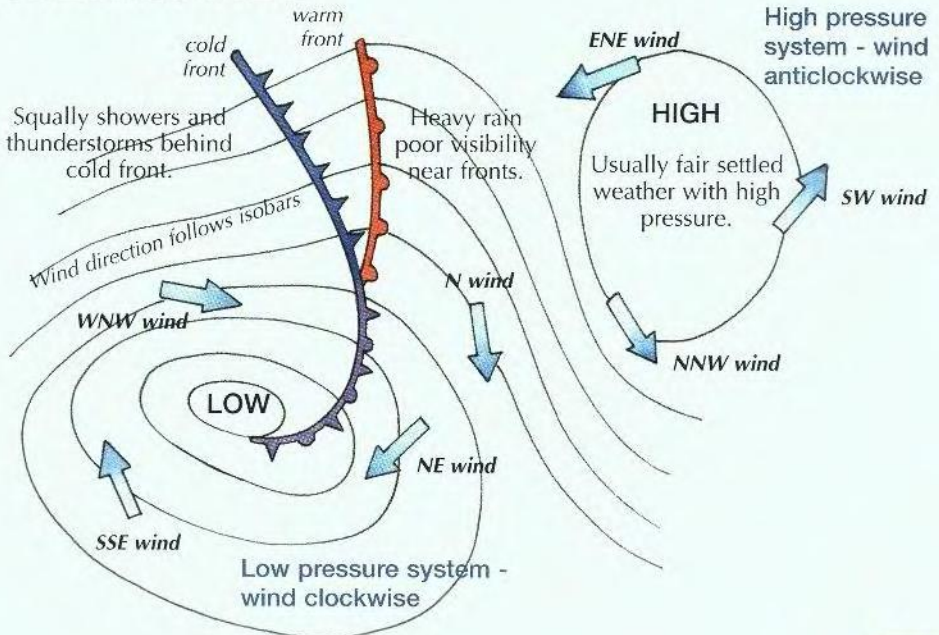

SHIPPING FORECAST AREAS

Get to know your local forecast areas

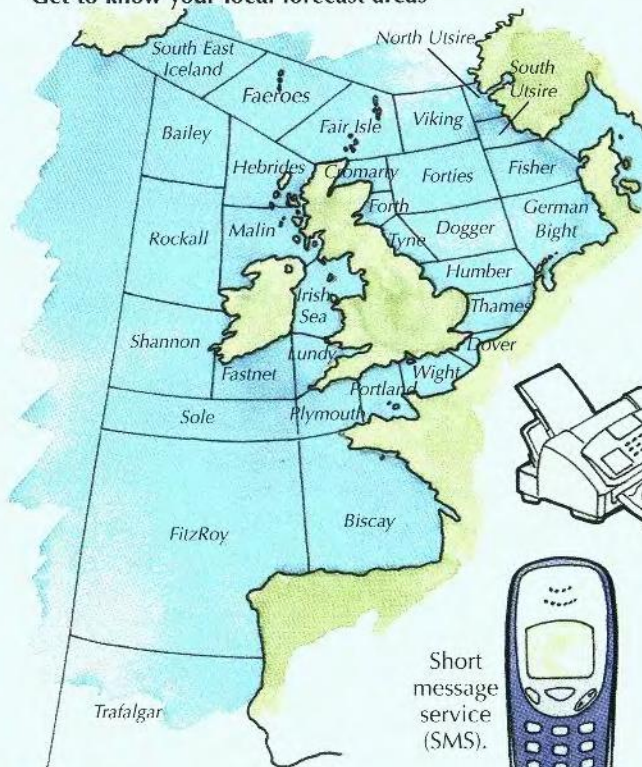

There are many different ways to obtain a forecast.



Marine safety information broadcasts on VHF by Coastguard.



Metfax



Short message service (SMS).




Recorded forecasts by phone.




Most harbour and marina offices.

Details of forecast times etc. can be found in an almanac or the RYA's Weather Forecasts book (G5)

Internet

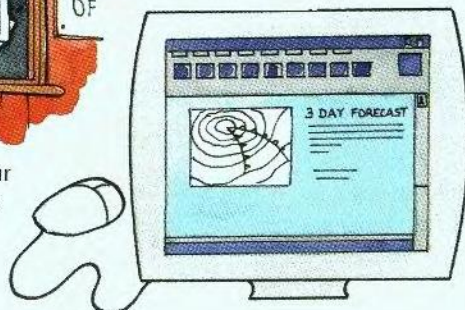

Teletext




Local radio stations.

TERMS USED IN FORECASTS

Gale warnings	If average wind is expected to be F8 or more, or gusts 43-51kn.
Strong wind warnings	If average wind is expected to be F6 or F7. F6 is often called a 'yachtsman's gale'.
Imminent	Within 6 hrs of time of issue of warning.
Soon	Within 6-12 hrs of time of issue of warning.
Later	More than 12 hrs from time of issue of warning.
Visibility	<i>Good</i> - greater than 5 miles <i>Moderate</i> - between 2-5 miles. <i>Poor</i> - 1,000m to 2 miles. Fog less than 1,000m.
Fair	No significant precipitation.
Backing	Wind changing in an anticlockwise direction eg NW to SW.
Veering	Wind changing in a clockwise direction eg NE to SE.
General synopsis	How and where the weather systems are moving.
Sea states	<i>Smooth</i> - wave height 0.2-0.5m <i>Slight</i> - wave height 0.5-1.25m. <i>Moderate</i> - wave height 1.25-2.5m <i>Rough</i> - wave height 2.5-4m. <i>Very rough</i> - wave height 4-6m.


LAND AND SEA BREEZES

Land breeze

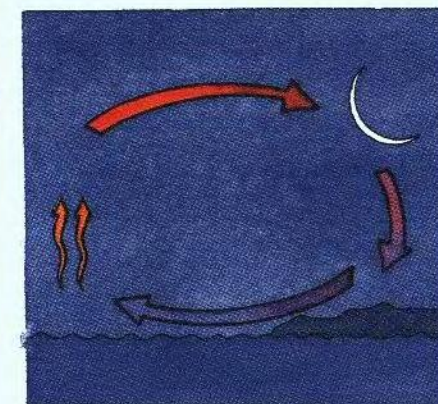

This occurs on a clear night when the air cools over land and flows downhill and out to sea, particularly from river estuaries. Wind usually no more than force 2-3 except near mountains.

Sea breeze

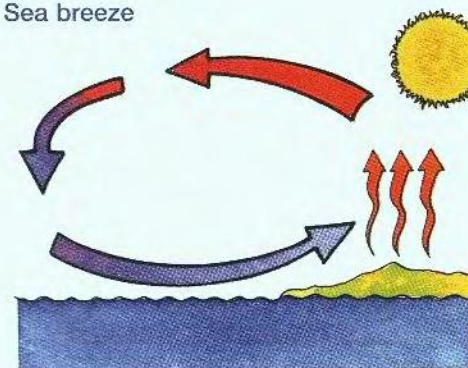

In fair weather and light to moderate offshore wind, a sea breeze is likely to develop. Warm air rises over land, it then cools, descends and blows onshore, generally up to force 4 in strength.


PLANNING THE DAY



Good skippering is all about making a good judgement on the weather and being considerate to your crew.

"Here is the inshore forecast issued at 0700 UT and valid till 0700 tomorrow. Winds South force 3 backing South East for a time then veering SW or W and increasing force 5 to 6, perhaps 7 by dusk. Weather fair, rain later".

Two boats start with the same basic weather information at 0730. Both decide to go for the day but make different decisions on timings.

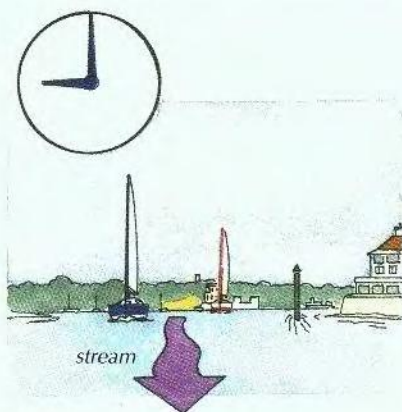


0900

It's a lovely morning and two boats are heading out of harbour taking the last of the ebbing tide.




They enjoy a short beat to a sheltered anchorage.

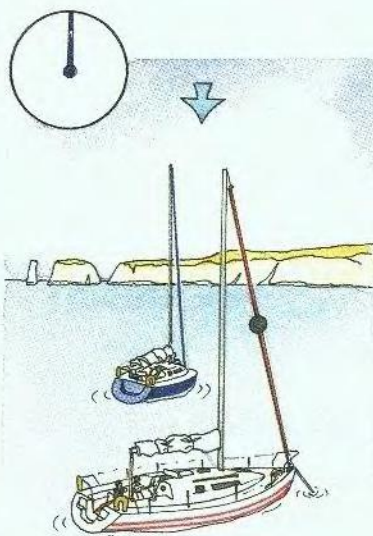


1200

... and a pleasant lunch. One skipper, remembering the forecast, is keeping a careful eye on the weather.

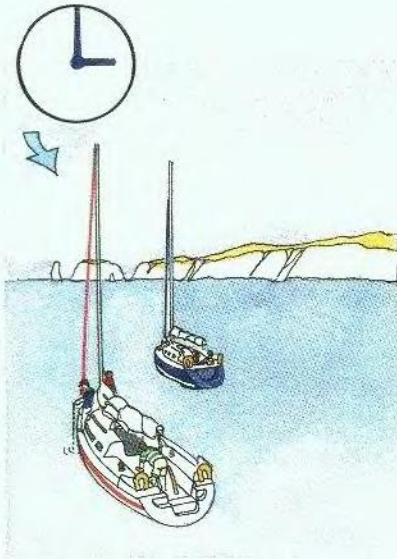


1500

As the wind backs into the SE he recognises the signs of an approaching weather front and decides now is a good time to return to base...

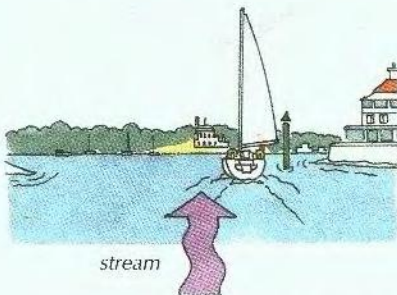


... and takes the last of the tide back into the harbour with a SE wind and has a flat sea state.

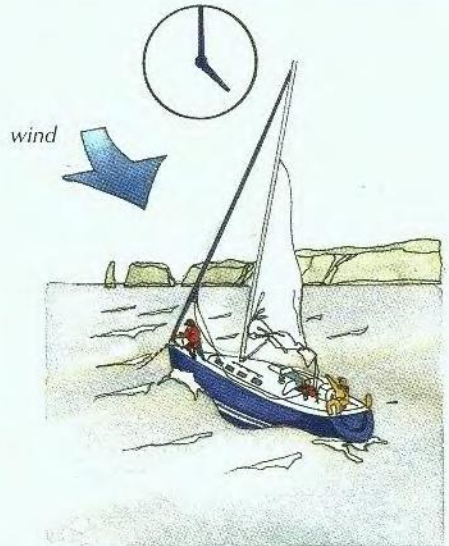

1700

As the wind increases the skipper of the blue boat faces a problem. Increasing wind makes weighing the anchor and hoisting sail unnecessarily difficult in the now exposed anchorage.

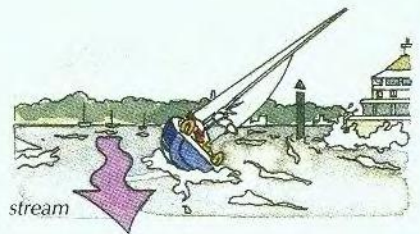

The wind veers and increases as forecast. They face a hard beat home in deteriorating weather, against the ebb tide.

Text paper



Cover paper



Watch
harbour
course
be swe
the ne
land be
course
expect
plan a

WP
34

Gaerri
It's es
buoyed
a cour



Instructions to your Bank or Building Society to pay by Direct Debit

Please complete this form and return it to:
Royal Yachting Association, RYA House, Ensign Way, Hamble, Southampton, Hampshire SO31 4YA



To The Manager:
Address:
Bank/Building Society
Post Code:

2. Name(s) of account holder(s)

3. Branch Sort Code

4. Bank or Building Society account number

Banks and Building Societies may not accept Direct Debit instructions for some types of account

Cash, Cheque, Postal Order enclosed

Made payable to the Royal Yachting Association

£

077

Office use only: Membership Number Allocated

Office use / Centre Stamp

Signature(s)

Date

Originators Identification Number









9 5 5 2 1 3

5. RYA Membership Number (For office use only)

6. Instruction to pay your Bank or Building Society

Please pay Royal Yachting Association Direct Debits from the account detailed in this instruction subject to the safeguards assured by The Direct Debit Guarantee. I understand that this instruction may remain with the Royal Yachting Association and, if so, details will be passed electronically to my Bank/Building Society.

RYA Publications



The RYA publishes over 70 books covering every aspect of boating. Some support specific practical and theory training courses and are valuable study and learning aids. Others provide technical, legal or general boating advice. All are expertly written, informative, authoritative and offer excellent value for money.

Details of all our publications, along with a comprehensive selection of other recommended books, videos and CDs can be found in the RYA Publications Catalogue.

Your will receive the catalogue each year with your membership card but if you would like another copy, please telephone 0845 345 0372

View the RYA Publications Catalogue online and order direct from the RYA webshop

www.rya.org.uk/shop

Day Skipper Practical Course Notes

These course notes are designed to accompany the RYA Day Skipper Practical Course held at sailing centres around the world. It also provides a wealth of valuable information to all those going to sea.

For more detailed reference books about the subjects covered in this book visit our website www.rya.org.uk or request a copy of our publications catalogue.

The RYA

The RYA is the UK governing body representing sailing, windsurfing, motor boating, powerboat racing and personal watercraft, at sea and on inland waters. It works for the good of all who enjoy these activities, campaigning for their interests at local, regional, national, European and world level.

Every year more than 140,000 people take an RYA training course or qualification. RYA training schemes are available worldwide.

This book is one of over 60 published by the RYA. Some relate to specific training courses and are a valuable study and learning aid. Others provide technical, legal or general boating advice. All are expertly written and informative.

More information

For information on other RYA books, videos and multimedia titles, to find an RYA-approved training course near you, or to support our wider work and gain valuable benefits by becoming a personal member, please visit our website at www.rya.org.uk. Information about courses available around the world can be found at www.rya-training.com



RYA, the RYA tick logo and YACHTMASTER are registered trade marks of the Royal Yachting Association (registered in the United Kingdom and selected marketing territories)

www.rya.org.uk

DAYSkipper PCN DSPCN/05

ISBN 978-1-905104-13-0



9 781905 104130 >